

15-063-20173-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217

WELL PLUGGING RECORD

GOVE County, Sec. 35 Twp. 13 Rge. (E) 30 (W)

Location as "NE/CNW/SW" or footage from lines C SE SE

Lease Owner DANE G HANSEN TRUST

Lease Name ROHR "A" Well No. 1

Office Address LOGAN, KANSAS 67646

Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE

Date well completed APRIL 22 1973

Application for plugging filed APRIL 22 1973

Application for plugging approved APRIL 22 1973

Plugging commenced APRIL 22 1973


Plugging completed APRIL 22 1973

Reason for abandonment of well or producing formation

TOO LOW STRUCTURALLY

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

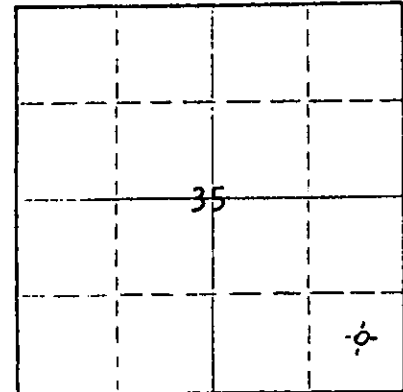

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. NICHOLS, MORLAND, KANSAS

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3871 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	254.34'	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.


FILLED WITH HEAVY MUD TO 1200'. SET PLUG. PUT IN 70 SACKS CEMENT. FILLED WITH HEAVY MUD TO 240'. SET PLUG. PUT IN 20 SACKS CEMENT. FILLED WITH HEAVY MUD TO 40'. SET PLUG. PUT IN 10 SACKS CEMENT AND 1 SACK HULLS. FILLED TO TOP.

RECEIVED
STATE CORPORATION COMMISSION
MAY 8 1973
05-08-1973
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor C-G DRILLING CO.
Address 1107 UNION NATIONAL BUILDING, WICHITA, KANSAS 67202

STATE OF KANSAS COUNTY OF SEDGWICK ss.
G. F. Galloway, contractor (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) G. F. Galloway
G. F. Galloway 1107 Union Natl Bldg
Wichita, Kansas 67202



Sworn to before me this 24th day of April, 1973.
Phyllis Buchanan
Notary Public.
My Comm. Expires September 7, 1974

15-063-20173-00-00

W E L L L O G

OPERATOR: DANE G HANSEN TRUST

WELL NAME: ROHR "A" #1 LOCATION: C SE SE SEC 35-13-30W

COUNTY: GOVE STATE: KANSAS

WELL COMMENCED: APRIL 14 '73 WELL COMPLETED: APRIL 22 '73

ELEVATION: 2723' KB TOTAL DEPTH: 3871'

PRODUCTION: DRY & ABANDONED RIG NO: 1
28#

CASING - 8-5/8": SET 254.34' (13 JTS) 8-5/8"/OD SURFACE CASING W/
5-1/2": 185 SACKS QUICKSET 2% GE1 & 3% CA CL

ALL MEASUREMENTS TAKEN FROM THE TOP OF ROTARY BUSHING:

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS:
0	880	SHALE		
880	965	SAND		
965	1655	SHALE & SHELLS	1° @ 1655'	
1655	2140	SHALE & SAND		
2140	2186	ANHYDRITE		
2186	2450	SHALE & RED BED		
2450	3871	LIME & SHALE	3/4° @ 2558'	DST #1 3791'-3810'
			1/2° @ 2946'	DST #2 3841'-3871'
			1/4° @ 3230'	
3871		RTD		

RECEIVED
STATE CORPORATION COMMISSION
MAY 8 1973
5-8-1973
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
COUNTY OF SEDGWICK) SS:

The undersigned hereby certifies that to the best of his knowledge and belief, the above facts are true and correct.

C-G DRILLING CO.

By G. F. Galloway
G. F. Galloway

SUBSCRIBED AND SWORN TO, BEFORE ME, This 24th day of April, 1973.

MY COMM. EXP. DEC. 7, 1975

Phyllis Buchanan
PHYLLIS BUCHANAN - NOTARY PUBLIC

