


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

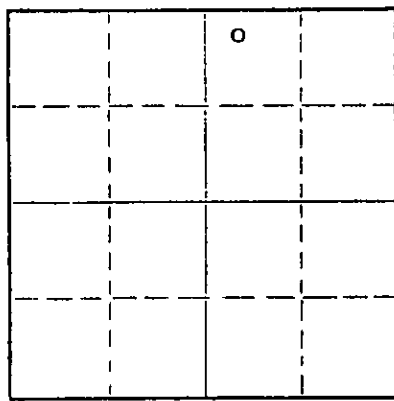

Locate well correctly on above Section Plat

Gove County, Sec. 5 Twp. 13 Rge. 29 (NW) (W)
Location as "NE/CNWxSWx" or footage from lines NW NW NE
Lease Owner Sun Oil Company
Lease Name Project #2 (Strat Hole) Well No. 2
Office Address Box 3383, Tulsa, Oklahoma 74101
Character of Well (completed as Oil, Gas or Dry Hole) Strat Test
Date well completed 11-22-1967
Application for plugging filed 11-22-1967
Application for plugging approved 11-22-1967
Plugging commenced 11-22-1967
Plugging completed 11-22-1967
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Bill Nichols
Producing formation None Depth to top Bottom Total Depth of Well 1700 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Morrison Sand	salt water	1605	1700	7"	320'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole full 9.1# mud:

- Placed 100 sacks 50-50 Pozmix, 6% gel, plug 765-1485'
- Placed 20 sacks 50-50 Pozmix, 6% gel, plug 222-372'
- Placed 10 sacks 50-50 Pozmix, 6% gel, plug 0-40'

Job completed 7:00 p.m. 11-22-67 (Sun representative Mr. D. H. Barnes)

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.
Address 801 Union Center, Wichita, Kansas

STATE OF Oklahoma COUNTY OF Tulsa, ss.
J. H. Allen (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. H. Allen
Box 3383, Tulsa, Oklahoma 74101
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of November, 1967

My commission expires June 24, 1968

George H. Watkins
Notary Public.

DRILLERS' LOG

RECORDED
 CONFIRMATION DIVISION
 DEC 8 1967
 CONFIRMATION DIVISION
 STATE OF OKLAHOMA

Sun Oil Company
 Project Well No. 2
 E/2 Section 5-13S-29W
 Gove County, Kansas

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>
Clay, sand, shale	0	326
Shale w/sand streaks	326	455
Sand	455	526
Shale	526	714
Sand, lime, shale	714	740
Shaly lime (Green Horn)	740	844
Shale	844	914
Sand w/shale streaks (Dakota)	914	1198
Shale	1198	1310
Sand w/shale streaks	1310	1434
Sand w/occ. shale streaks (Morrison)	1434	1514
Sand and shale	1514	1650
Shale (Permian)	1650	1700

Spudded November 18, 1967

T.D. 1700' November 21, 1967

Surface casing 7" at 320' w/100 sacks.

DST 1605-1700' recovered salt water.


I hereby certify that the foregoing is a true and correct copy of the Project No. 2 well log as recorded on the books of Sun Oil Company, Tulsa, Oklahoma.



 J. H. Allen

STATE OF OKLAHOMA)
 COUNTY OF TULSA) SS

Subscribed and sworn to before me this 7th day of December, 1967.



 Notary Public

My Commission Expires:

~~XXXXXX~~
 March 16, 1968