

15-05120493-00-00
WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Ellis County, Sec. 27 Twp. 13 Rge. (E) 20 (W)

Location as "NE/CNW/SW" or footage from lines SE NE SW

Lease Owner Harold Erbert

Lease Name Giebler A-1 Well No.

Office Address Iola, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed September 6 1969

Application for plugging filed September 6 1969

Application for plugging approved September 6 1969


Plugging commenced September 6 1969

Plugging completed September 6 1969

Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

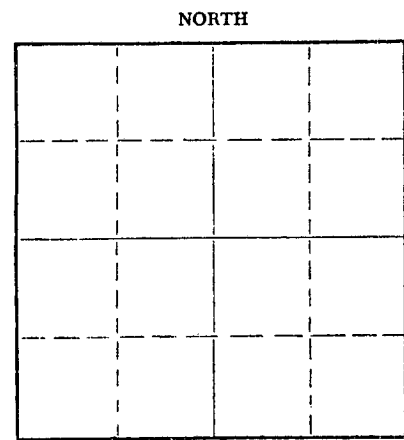

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 3854 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	250'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug @ 720 w/70 sacks 50/50 Pozmix, 6% Gel, plug w/20 sacks @ 240
Bridge Plug @ 40' w/1/2 sack hulls 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
SEP 17 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Leben Drilling, Inc.
Address Box 486, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.
Leslie Kite (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Leslie Kite

Box 486, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 16 day of September, 1969

My commission expires October 19, 1972

Emma Moxter Benoit



DRILLER'S LOG

COMPANY
CONTRACTOR
FARM
LOCATION

HAROLD ERBERT
LEBEN DRILLING, INC.
GIEBLER A-1
SE NE SW SECTION 27-13S-20W
ELLIS COUNTY, KANSAS
8-27-69
9-6-69

COMMENCED
COMPLETED

15.051.20493.00.00

0 750
750 1530
1530 1531
1531 1576
1576 2085
2085 2515
2515 3854
 3854

Shale
Red Bed & Shale
Shale
Anhydrite
Shale
Lime & Shale
Lime
RTD

RECEIVED
STATE CORPORATION COMMISSION
SEP 17 1969
CONSERVATION DIVISION
Wichita, Kansas

8 5/8" 20# new surface casing set @ 250' cemented with 170 sacks Common cement,
2% cc.

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct
copy of the log of the Giebler A-1 well, located SE NE SW of Section 27, Township
13 South, Range 20 West, Ellis County, Kansas, as reflected by the records of
Leben Drilling, Inc.

Leslie Kite

Leslie Kite

STATE OF KANSAS)
) SS
COUNTY OF BARTON)

Subscribed and sworn to and before me, a Notary Public, in and for
Barton County, Kansas, this 16th day of September, 1969.

Emma Moxter Benoit
Emma Moxter Benoit

My Commission Expires:
October 19, 1972