


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

15057-02890-00:00
WELL PLUGGING RECORD

NORTH

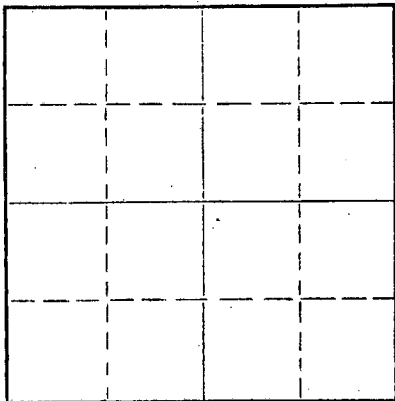

Locate well correctly on above
Section Plat

Ellis

County. Sec. 27 Twp. 13S Rge. 20W (E) (W)

Location as "NE/CNW%SW%" or footage from lines SW SW NE

Lease Owner Imperial Oil of Kansas, Inc.

Lease Name Giebler "C" Well No. 2

Office Address 780 Fourth National Bldg., Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil Well

Date well completed January 4 19 58

Application for plugging filed June 17 19 60

Application for plugging approved June 21 19 60

Plugging commenced June 14 19 60

Plugging completed June 17 19 60

Reason for abandonment of well or producing formation Commercial quantities of oil depleted.

If a producing well is abandoned, date of last production June 14 19 60

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty - Hays, Kansas

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3942 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	216'	Not Pulled
				5-1/2"	3875'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Moved on location, raised mast, checked hole started cleaning cellar.
Mixed and run 4 sacks cement on plug at 2849'. Took tension on pipe. Worked tension to 26" shot casing at 2805'. Worked free and pulled 25 jts.
Pulled 45 jts. Stopped bottom of pipe at 600', circulated with 30 sacks mud and spotted 20 sacks cement.
Pulled casing to 190' spotted 20 sacks cement. Finished pulling pipe. Mudded hole.
Mudded to 40' set 10' rock bridge, mixed and run 10 sacks of cement, cut off braden head. Loaded tools and moved off location.

RECEIVED
STATE CORPORATION COMMISSION

JUN 3 0 1960

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Southwest Casing Pulling Company
Address P. O. Box 364, Great Bend, Kansas

(If additional description is necessary, use BACK of this sheet)

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
K. J. Boone (employee of IMPERIAL OIL OF KANSAS, INC. operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God, IMPERIAL OIL OF KANSAS, INC.


(Signature) By: *K. J. Boone* Pet. Engr.

780 Fourth National Bldg., Wichita 2, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 29th day of June, 19 60

Dena L. Later
Notary Public.

My commission expires July 7, 1962

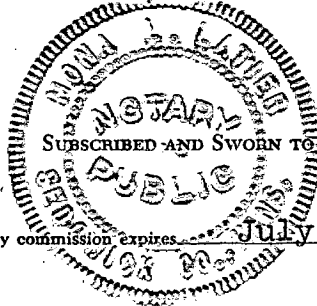

DRILLER'S LOG 15-051-02890-00-00

Imperial Oil of Kansas, Inc.
780 Fourth National Building
Wichita 2, Kansas

Giebler "C" No. 2
SW SW NE Sec. 27-13S-20W
Ellis County, Kansas

Total Depth: 3942'

Commenced: 12-17-57 Completed: 1-14-58

Elevation: 2206'
Production: 28 BOPD, 54% Wtr.

Contractor: Imperial Oil of Kansas, Inc.
Wichita, Kansas

Casing Record: Set 8-5/8 Surface Pipe at 216' with 175 sacks cement.


Figures indicate bottom of formations:

Sand, shale & shells	216'		
Shale & shells	625'		
Shale, shells & sand	1250'		
Shale & shells	1512'		
Anhydrite	1556'		
Shale & shells	2085'	Anhydrite	1512' (/ 694)
Shale & lime	3450'	Heebner	3446' (-1243)
Lime	3535'	Toronto	3467' (-1264)
Shale & lime	3573'	Lansing	3485' (-1282)
Lime	3834'	Arbuckle	3826' (-1620)
Arbuckle	3942'	Torary Total Depth	3942' (-1736)
Total Depth	3942'		

We hereby certify this to be a correct and accurate log of the above described well as shown on the daily drilling reports.

IMPERIAL OIL OF KANSAS, INC.

By: Raymond H. Bacon
Vice President

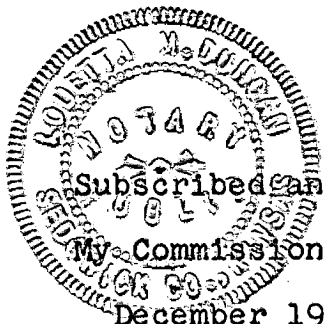

Subscribed and sworn to before me this 17th day of January, 1958.

My Commission Expires: **RECEIVED**
STATE CORPORATION COMMISSION
December 19, 1960

JUN 30 1960

Louetta M. Duncan
Notary Public

CONSERVATION DIVISION
Wichita, Kansas