


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD 15-051-21341-00-00

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Ellis County, Sec. 27 Twp. 13S Rge. 20 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
Center of NE NW
Lease Owner Black-Stem Investors
Lease Name Befort Well No. 1
Office Address Catherine Rt., Box 39, Hays, Kansas 67665
Character of Well (Completed as Oil, Gas or Dry Hole)

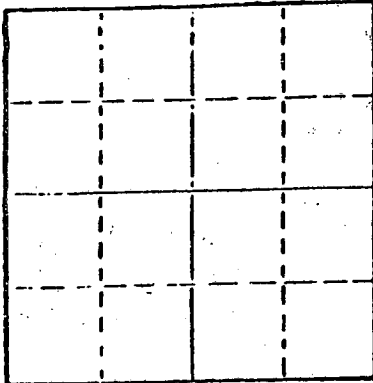

D & A
Date Well completed 7-2 19 77
Application for plugging filed 7-2 19 77
Application for plugging approved 7-2 19 77
Plugging commenced 5:00 A.M. 7-2 19 77
Plugging completed 7:30 A.M. 7-2 19 77
Reason for abandonment of well or producing formation

D. & A.
If a producing well is abandoned, date of last production
None 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation None Depth to top Bottom Total Depth of Well 3830'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS 8 5/8 casing set 215' CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole to 720' with heavy mud.
Mixed 70 sacks cement of 50-50 Poz 6% gel and pumped thru drill pipe at 720'
Mixed 20 sacks cement 50-50 Poz 6% gel and pumped thru drill pipe at 215'
Set plug at 40', mixed 10 sacks cement, filled hole to bottom of cellar.

RECEIVED
STATE CORPORATION COMMISSION

JUL 08 1977

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Revlin Drlg., Inc. CONSERVATION DIVISION
Wichita, Kansas

STATE OF Kansas COUNTY OF Ellis ss.
S. C. Lingreen (employee of owner) or (owner or operator) of the above-described well, being first-duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) S. C. Lingreen
Box 88, Russell, Kansas 67665
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of July, 1977

Lauraine Sullivan
Notary Public.

My commission expires January 29th, 1981





DON J. REVELL 913-483-4022
STANLEY C. LINGREEN 913-368-4516

15-051-21341-00-00

OFFICE PHONE 913-483-5355

BOX 88
RUSSELL, KANSAS 67665
Well: Befort # 1
Center of NE NW
Sec. 27, Twp. 13S, Rge. 20W
Ellis County, Kansas
July 7, 1977

Lease Owner: Black-Stem Investors

6-22-77 Daylight Tower 0'-20'	Surface clay & sand	6-30-77 Morning Tower 3568'	
Evening Tower 20'-215'	Shale & Shells	Daylight Tower 3668'	
		Evening Tower 3568'-3585'	Lime & Shale
6-23-77 Morning Tower 218'-565'	Shale	7-1-77 Morning Tower	Lime & Shale
Daylight Tower 565'-100'	Shale		
1000'-1100'	Sand		
1100'-1250'	Red Bed		
1250'-1285'	Anhydrite		
Evening Tower 1295'-1365'	Red Bed		
6-24-77 Morning Tower 1368'-1508'	Shale		
1508'-1550'	Anhydrite		
1550'-1880'	Shale & Shell		
Daylight Tower 1880'-2050'	Shale & Shell		
2050'-2180'	Lime & Shale		
Evening Tower 2180'-2415'	Lime & Shale		
6-25-77 Morning Tower 2415'-2461'	Shale & Shells		
2461'-2505'	Ft. Riley		
Daylight Tower 2505'-2675'	Lime & Shale		
Evening Tower 2675'-2851'	Lime & Shale		
6-26-77 Morning Tower 2851'-2976'	Lime & Shale		
Daylight Tower 2976'-3200'	Lime & Shale		
Evening Tower 3200'-3269'	Lime & Shale		
6-27-77 Morning Tower 3269'-3379'	Lime & Shale		
Daylight Tower 3379'-3480'	Lime & Shale		
Evening Tower 3480'-3568'	Lime & Shale		

RECEIVED
STATE CORPORATION COMMISSION

JUL 08 1977

CONSERVATION DIVISION
Wichita, Kansas