


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Gove County, Sec. 34 Twp. 14S Rge. (E) 27 (W)
Location as "NE/CNW/SE" or footage from lines C SE NW
Lease Owner Pickrell Drilling Company
Lease Name Rohr "B" Well No. 2
Office Address 705 Fourth National Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 1, 1966
Application for plugging filed October 1, 1966
Application for plugging approved October 1, 1966
Plugging commenced October 1, 1966
Plugging completed October 1, 1966
Reason for abandonment of well or producing formation Dry Hole

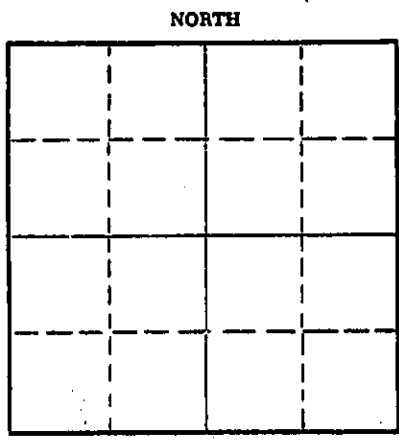

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols, Moreland, Kansas
Producing formation Depth to top Bottom Total Depth of Well 3710 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	247'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud to 500'. Set plug. Cemented with
25 sacks cement. Heavy mud to 240'. Set plug.
Cemented with 20 sacks cement. Heavy mud to 40'.
Set plug. Cemented with 10 sacks cement to bottom.
of cellar. Plugged rat hole with 2 sacks cement.

RECEIVED
OCT 7
10-07-66

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pickrell Drilling Company
Address 705 Fourth National Bank Bldg., Wichita, Kansas


STATE OF KANSAS COUNTY OF SEDGWICK, ss.
G. W. SEBITS (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) G. W. Sebits
705 Fourth National Bank Bldg., Wichita, Ks.
(Address)

Subscribed and sworn to before me this 5th day of October, 1966

My commission expires May 10, 1970 L. M. Whiting Notary Public.



ROTARY DRILLING LOG

15-063-30094-00-00

COMPANY: Pickrell Drilling Company
705 Fourth National Bank Bldg.
Wichita, Kansas

Rotary Drilling Commenced 9/24/66

Rotary Drilling Completed 10/1/66

LOCATION: Rohr "B" No. 2
C SE NW Section 34-14S-27W
Gove County, Kansas

CONTRACTOR: **PICKRELL DRILLING COMPANY**
Wichita, Kansas

CASING RECORD: (12 jts.) 8 5/8" surface casing set at 247' with 165 sacks of cement. Circulated. Completed 1:45 PM September 24, 1966. Pipe was stuck during connection at 3710, and pipe was parted at 2293'. Fishing operations were conducted without success and hole was plugged and abandoned October 1, 1966.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

60	Post Rock & Clay
247	Shale & Shells
1265	Shale & Clay
1680	Shale, Sand & Shells
1870	Shale, Shells & Lime
1920	Anhydrite
2245	Shale, Shells & Lime
2865	Lime & Shale
2965	Lime
3710	Lime & Shale, RTD

C. F. S.
None

Slope Tests
None

S. 6. L. M. [unclear] [unclear]
None
OCT 7 1966
CONFIRMATION [unclear]
[unclear]

The undersigned, C. W. SEBITS, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY
By [Signature]
C. W. SEBITS Attorney-in-Fact

STATE OF KANSAS }
COUNTY OF SEDGWICK } ss.:

On this 5th day of October, 1966, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. SEBITS, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

My commission expires: May 10, 1970

[Signature]
L. M. Whiting Notary Public