


15-109-20045-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Logan County, Sec. 27, Twp. 13S, Rgn. 32W (E) (W)  
Location as "NE/CNWSWS" or footage from lines C NW NW

Lease Owner: Beren Corporation  
Lease Name: Cunningham Well No. 1  
Office Address: 970 Fourth Financial Center, Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole): D & A  
Date well completed: July 17, 1975  
Application for plugging filed: July 17, 1975  
Application for plugging approved: July 17, 1975  
Plugging commenced: July 17, 1975  
Plugging completed: July 17, 1975  
Reason for abandonment of well or producing formation: D & A

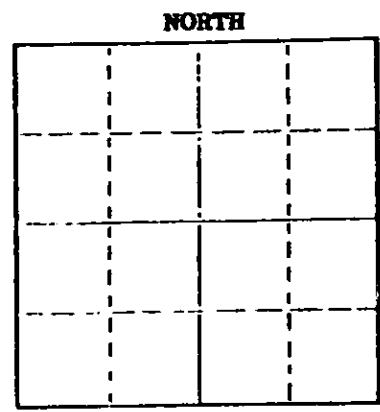

Locate well correctly on above Section Plot

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well: Mr. W.L. Nichols  
Producing formation: Depth to top: Bottom: Total Depth of Well: 4701 F-1  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	330.44'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug #1 @ 1300' w/70 sx.  
Plug #2 @ 300' w/20 sx.  
Plug #3 @ 40' w/10 sx., 1 sk. hulls.  
Cmt. was 50-50 pozmix, 6% gel.

Name of Plugging Contractor: Red Tiger Drilling Company  
Address: 1720 Wichita Plaza, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick ss.  
Linda H. Dickens (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Linda H. Dickens  
1720 Wichita Plaza, Wichita, Kansas 67202  
(Address)

Subscribed and sworn to before me this 28th day of July 1975

(Signature) D. Ann Drennan  
Notary Public.

My commission expires December 28, 1977



RECEIVED  
STATE CORPORATION COMMISSION  
JUL 26 1975

DRILLERS LOG

No. 1 Cunningham

<b>CASING RECORD:</b>	<b>COMPANY:</b>	Beran Corporation	<b>DESCRIPTION:</b>
8-5/8" @ 330.44'	<b>CONTRACTOR:</b>	Red Tiger Drilling Company	C MW NM
w/200 sx. cnt.	<b>COMMENCED:</b>	July 1, 1975	27-135-32W
	<b>COMPLETED:</b>	July 17, 1975	Logan County, Kansas
<b>TOTAL DEPTH:</b> 4701'			<b>ELEVATION:</b>

<u>Formation</u>	<u>From</u>	<u>To</u>	<u>Remarks</u>
Shale & Clay	0	330	
Shale	330	1482	
Post Rock & Shale	1482	1800	
Shale	1800	2510	
Anhydrite	2510	2531	
Shale & Shells	2531	2620	
Shale	2620	2865	
Shale & Lime	2865	3070	
Lime & Shale	3070	3175	
Shale & Lime	3175	3265	
Lime	3265	3360	
Shale	3360	3420	
Lime & Shale	3420	3500	
Lime	3500	4485	
Lime & Shale	4485	4500	
Lime	4500	4701	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Linda H. Dickens  
Linda H. Dickens

Subscribed and sworn to before me this 28th day of July, 1975.

D. Ann D. ...  
Notary Public

My Commission Expires:

December 28, 1977

