

15-169-19023-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Saline County, Sec. 16 Twp. 14 Rge. 2 (E) (W)

Location as "NE/CNW/SW" or footage from lines NW NE

Lease Owner Walter J. Nelson

Lease Name Brier Well No. 1

Office Address Salina, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 12--3-65 19

Plugging completed 12--6-65 19

Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

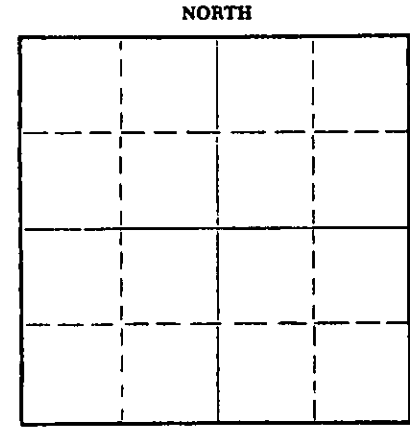

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation Depth to top Bottom Total Depth of Well 3171 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	152'	none
				5-1/2"	3167'	2703'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 3171', sanded hole to 3150' and dumped 5 sacks of cement @ 3150' with dump bailer. Pulled 5' casing, bailed hole to 150', set rock bridge to 145' and dumped 20 sacks of cement @ 145'. Mudded hole to 30' and ran 10 sacks of cement to base of cellar.

JAN 20 1966

PLUGGING COMPLETE.

Conservation Division
Walter J. Nelson

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY

Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss. Noel J. Knight (employee of owner) or (owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight

Chase, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of December, 19 65

Milton J. Volin

Notary Public.

My commission expires May 20, 1968

15-169-19023-00-00

DRILLERS LOG

Well: Breer #1

Location: NW NW Sec. 16-T14-R2, Saline Co., Kansas

Contractor: Knight Drilling Co.

Operator: W. J. Nelson, Salina, Kansas

Date Commenced: November 15, 1963

Date Completed: Dec. 1, 1963 Producer

152' - 8 5/8" Casing. 75 sx. cm.

3167' - 5 1/2" Casing Producer

0	-	40'	Clay & sand
40	-	120	Shale & lime
120	-	152	" "
152	-	703	Lime & shale
703	-	1030	Shale & shells
1030	-	2130	Lime & shale
2130	-	2400	Lime
2400	-	2550	Shale & lime
2550	-	2655	Lime
2655	-	2900	Chert & lime
2900	-	2990	Shale
2990	-	3010	Lime & chert
3010	-	3171	Lime
3171	-		T.D.

RECEIVED
STATE CORPORATION COMMISSION

NOV 16 1965
11-16-1965
CONSERVATION DIVISION
Wichita, Kansas