

15-051-20991-00-00


FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Ellis County, Sec 33 Twp 14S Rgn 16W (E) (W)

Location as "NE/CNW/SE/SW" or footage from lines SW SW SW
Lease Owner Cities Service Oil Co.
Lease Name Rajewski "B" Well No. 1
Office Address 209 E. William, 700 Sutton Place Bldg., Wichita, KS
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed Dec. 1 1974
Application for plugging filed Dec. 1 1974
Application for plugging approved Dec. 1 1974
Plugging commenced Dec. 1 1974
Plugging completed Dec. 1 1974
Reason for abandonment of well or producing formation D & A

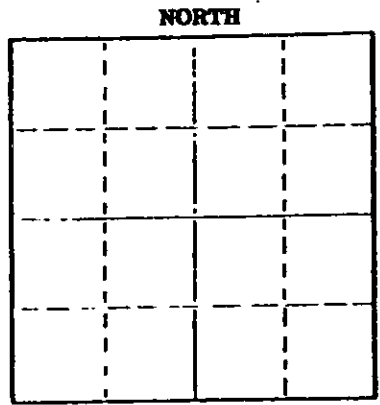

Locate well correctly on above Section Plot

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Leo F. Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3570' F.O.I
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS					CASING RECORD	
FORMATION	CONTENT	FROM	TO	SIZE	POT IN	PULLED OUT
				8-5/8"	803'	-0-

RECEIVED
STATE CORPORATION COMMISSION
DEC 9 1974
CONSERVATION DIVISION
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole w/heavy mud. Set plug @ 803'
w/50 sx. 50-50 pozmix, 2% gel. Plug @
240' w/20 sx. 50-50 pozmix, 2% gel. Set
Plug @ 40' w/1/2 sk. hulls & 10 sx. cmt.


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Red Tiger Drilling Co.
Address 1720 Wichita Plaza, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick ss.
Linda H. Dickens (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Linda H. Dickens
1720 Wichita Plaza, Wichita, KS 67202
(Address)

Subscribed and Sworn to before me this 4th day of December 1974

My commission expires December 28, 1977
Notary Public.



15-051-20991-00-00

DRILLERS LOG

No. 1 Rajewski "B"

CASING RECORD: COMPANY: Cities Service Oil Co.
8-5/8" @ 863' CONTRACTOR: Red Tiger Drilling Co.
w/600 sx. cnt. COMMENCED: November 20, 1974
TOTAL DEPTH: 3570' COMPLETED: December 1, 1974

DESCRIPTION:

SW SW SW
33-14S-16W
Ellis County,
Kansas

ELEVATION:

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Shale & Sand	0	230	
Shale & Shells	230	455	
Sand	455	646	
Redbed & Shale	646	805	
Shale & Redbed	805	1011	
Anhydrite	1011	1062	
Shale	1052	1055	
Shale & Shells	1055	1747	
Shale w/Lime	1747	1867	
Shale & Lime	1867	2080	
Lime & Shale	2080	2330	
Shale & Lime	2330	2462	
Lime & Shale	2462	2573	
Shale w/Lime	2573	2705	
Shale & Lime	2705	2889	
Lime	2889	3470	
Lime & Chert	3470	3550	
Lime w/Chert	3550	3570	

RECEIVED
STATE CORRELATION COMMISSION
DEC 6 1974
CONSERVATION DIVISION
12-09-1974

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Linda H. Dickens
Linda H. Dickens

Subscribed and sworn to before me this 4th day of December, 1974.

D'Ann Drennan
Notary Public

My Commission Expires:

December 28, 1977

