


STATE OF KANSAS  
 STATE CORPORATION COMMISSION  
 CONSERVATION DIVISION  
 P. O. BOX 17027  
 WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

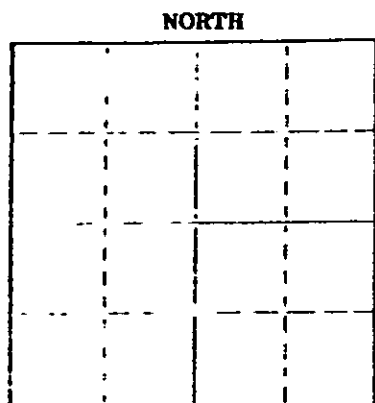

Locate well correctly on above Section Plat

Ellis County, Sec 36 Twp 14 Rge 16 (E) West W  
 Location as "NE, CN, WKS, SW" or footage from lines C NW SW NW  
 Lease Owner Petroleum, Inc.  
 Lease Name BAUMRUCKER Well No. 1  
 Office Address 800 R. H. Garvey Bldg, 300 West Douglas, Wichita, Ks  
 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
 Date well completed December 9 19 74  
 Application for plugging filed December 9 19 74  
 Application for plugging approved December 9 19 74  
 Plugging commenced December 9 19 74  
 Plugging completed December 9 19 74  
 Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production 19  
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
 Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3396  
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Squeezed 120 sacks 50/50 Pozmix thru 8 5/8" pipe.

RECEIVED  
 STATE CORPORATION COMMISSION  
 DEC 11 1974  
 CONSERVATION DIVISION  
 Wichita, Kansas

Name of Plugging Contractor Duke Drilling Company  
 Address Box 823, Great Bend, Kansas

All of KANSAS COUNTY OF BARTON  
 Wayne Dobbs (employee of owner) or (agent of owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wayne Dobbs  
 Box 823, Great Bend, Kansas  
 (Address)

Subscribed and sworn to before me this 10th day of December 19 74

My commission expires April 11, 1978  
 Notary Public

15-051-20995-00-00

DRILLERS' WELL LOG

DATE COMMENCED: December 2, 1974  
DATE COMPLETED: December 9, 1974

Petroleum, Inc.  
BAUMRUCKER # 1  
C NW SW NW  
Sec. 36-T14-R16W  
Ellis County, Kansas

ELEVATION 1846 K.B.

0 - 40'	Post Rock and Sand
40 - 350'	Shale, Clay, Shells
350 - 938'	Shale and Sand
938 - 968'	Anhydrite
968 - 980'	Shale
980 - 1735'	Shale, Shells
1735 - 1805'	Shale, Lime
1805 - 2100'	Lime
2100 - 2270'	Lime and Shale
2270 - 2640'	Lime
2640 - 2825'	Lime, Shale
2825 - 3055'	Lime
3055 - 3059'	Shale
3059 - 3109'	Lime and Shale
3109 - 3376'	Lime
3376 - 3396'	Dolomite
3396'	RTD

FORMATION TOPS

Anhydrite	938
Heebner	3055
Toronoto	3073
Lansing	3109
Arbuckle	3376
RTD	3396

SURFACE PIPE: Set 246' of  
8 5/8", 20# new pipe w/150  
sacks common 2% gel, 3% cc.

AFFIDAVIT

STATE OF KANSAS )  
COUNTY OF BARTON ) ss.

RECEIVED  
STATE CORPORATION COMMISSION  
12-13-1974  
DEC 13 1974  
CONSERVATION DIVISION  
Topeka, Kansas

Wayne Dobbs, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Wayne Dobbs

Subscribed and sworn to before me this 10th day of December, 1974.

Henry M. Hague  
Notary Public

My Commission Expires: April 11, 1978