

15-051-00303-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Ellis County. Sec. 36 Twp. 14 Rge. 16W (~~16E~~) (W)

Location as "NE/CNW&SW&" or footage from lines SE NE NW

Lease Owner Rudy Herman Oil Operations

Lease Name Baumrucker Well No. 1

Office Address Box 348 Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) D&A

Date well completed _____ 19__

Application for plugging filed _____ 19__

Application for plugging approved _____ 19__


Plugging commenced _____ 19__

Plugging completed April 19, 19 59

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

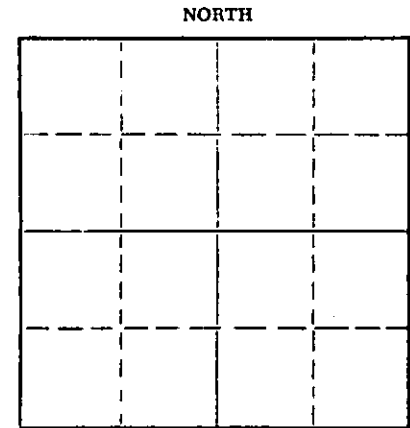

Name of Conservation Agent who supervised plugging of this well Eldon Pety

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3402' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

8 5/8" at 264' Cwc
Filled hole with heavy mud, pumped cementing plug followed by
125 sacks cement.
Cementing by Halliburton Cementing Co. - 400# pump pressure.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Company & Halliburton Cementing Co.
Address Russell, Kansas

STATE OF _____, COUNTY OF _____, ss.

_____, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Rudy Herman

(Address) _____

SUBSCRIBED AND SWORN TO before me this 28th day of March, 1966

My commission expires January 15, 1969 Shelby McWhit Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

508 East Murdock,

Wichita, Kansas


15-051-00303-00-00

Company- RUDY A. HERMAN
Farm- Baumrucker No. 1

SEC. 36 T. 14 R. 16W
SE NE NW

Total Depth. 3402'
Comm. 4-9-59 Comp. 4-18-59
Shot or Treated.
Contractor. Shields Drlg. Co.
Issued. 6-27-59

County Ellis
KANSAS



CASING:
8 5/8" 264' cem w/175 ex.

Elevation. 1846' RB

Production. Dry

Figures Indicate Bottom of Formations.

surface soil, sand & rock	201
shale	468
sand	585
shale and shells	875
red bed, shale	934
Anhydrite	970
red bed, shale & shells	1330
shale, shells and salt	1550
shale w/lime streaks	1640
lime and shale	2883
lime	3367
Conglomerate	3402
Total Depth	

TOPS:	
Topeka	2820
Heebner	3047
Toronto	3064
Lansing-Kansas City	3099
Conglomerate	3339

DST #1 3080-3113', op 1 hr, weak blow
20 min. rec. 10' rotary mud, BHP 960#/20 mins.

DST #2 3117-3180', op 1 hr, w/weak blow
for 40 min. rec. 10' rotary mud w/V.S.S.
free oil on top tool. BHP 395#/30 mins.

DST #3 3180-3250', op 1 hr., w/weak blow
for 1 hr., rec. 60' rotary mud, BHP 925#/30 min.

RECEIVED
STATE CORPORATION COMMISSION

JUL 16 1964

CONSERVATION DIVISION
Wichita, Kansas

07-16-1964