

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

15051028820000

Ellis County, Sec. 25 Twp. 13 Rge. (E) 20 (W)

Location as "NE/CNW&SW¼" or footage from lines SW SW SE

Lease Owner Lario Oil & Gas Company

Lease Name Younger Well No. 3

Office Address 301 S. Market, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed May 15, 19 57

Application for plugging filed February 19, 19 74

Application for plugging approved February 20, 19 74


Plugging commenced March 25, 19 74

Plugging completed April 2, 19 74

Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production September 30 19 71

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

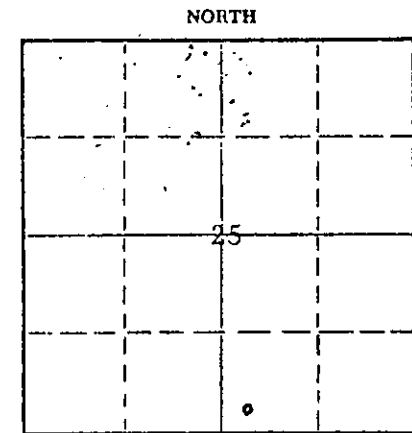

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Arbuckle Depth to top 3826 Bottom Total Depth of Well 3845 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	240	None
				5 1/2	3845	1992'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Dumped 25' of sand and 4 sacks of cement to plug bottom. Plugged well with 25 sacks gel, 70 sacks of Halliburton light cement, 8 sacks Gel, one sack hulls. Pumped 50 sacks of cement on plug.

RECEIVED
STATE CORPORATION COMMISSION
APR 10 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Nicholas Casing Pulling

Address Box 373, Geneseo, Kansas 67444

STATE OF Kansas, COUNTY OF Sedgwick, ss. G. R. Kelsey (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me, God.

(Signature) [Signature] Div. Prod. Supt.
301 S. Market, Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 8th day of April 19 74

[Signature] Notary Public.

My commission expires July 21, 1974

Dup

15051-02882-00-00
 LARIO OIL & GAS CO. ET AL
 YOUNGER NO. 3
 SW SW SE Sec. 25-13S-20W
 Ellis County, Kansas

RECEIVED
 STATE CORPORATION COMMISSION

FEB 20 1974

CONSERVATION DIVISION
 (Wichita, Kansas)

Date Commenced: April 29, 1957
 Date Completed: May 15, 1957
 Drilling Contractor - Sterling Drilling Company
 Total Depth - 3845'
 Initial Pot.- 36l oil, no water 24 hour physical test

<u>Formation</u>	<u>Depth</u>
Shale	815
Shale & shells	1130
Sand	1250
Shale & red bed	1450
Shale	1490
Anhydrite	1525
Shale	1570
Shale & shells	2135
Lime & shale	2510
Lime	2580
Lime & shale	2855
Lime	3845

CASING RECORD:

8 5/8" 240' Cem. 150 sacks
 5 1/2" 3873.83' Set @ 3845' Cem. w/
 100 sacks
 (Set Baker stage collar @ 1482' and
 circulated Ken-Pac)

GEOLOGICAL TOPS - K.B. MEAS.

Anhydrite	1490 (-706)
Topeka	3177 (-981)
Heebner	3438 (-1242)
Toronto	3460
Base Oread	3472
Lansing	3473 (-1282)
Base Kansas City	3735
Marmaton Cherty Ls.	3774
Conglomerate	3800 (-1604)
Arbuckle	3825 (-1630)

Lane-Wells perforated 62 holes
 from 3828-3840'.
 Dowell acidized 250 gallons XIM-38.
 Dowell acidized 1000 gallons XIM-38.

I hereby certify that this is a true and
 correct log of the above mentioned well.

[Signature]

STATE OF KANSAS

COUNTY OF SEDGWICK

} ss

Subscribed and sworn to before me, a notary
 public, in and for said County and State
 this 29th day of May, 1957.

[Signature]
 Notary Public

My Commission expires July 21, 1958.

COPY