

15-167-20386.00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

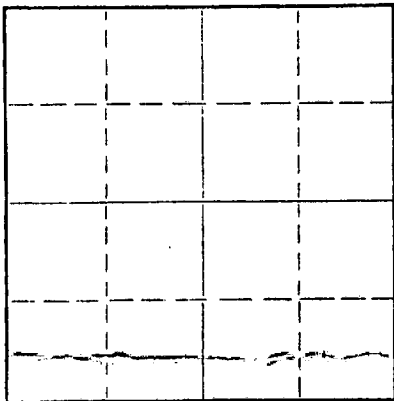

Locate well correctly on above
Section Plat

Russell County. Sec.16 Twp.14S Rge. (E)11 (W)
Location as "NE/CNW/SW" or footage from lines SE SE SW (approx.)
Lease Owner Saline Basin Petroleum Co.
Lease Name Kline Well No. 1-B
Office Address 119 Santa Fe, Salina, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 1-10-70 19
Application for plugging filed 1-10-70 19
Application for plugging approved 1-10-70 19
Plugging commenced 1-10-70 19
Plugging completed 1-10-70 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truane
Producing formation Depth to top Bottom Total Depth of Well 2969 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole to 260 feet with heavy mud. Set plug and 1/4 sack rolled tied hulls at 260 feet. Cemented hole with 25 sacks through drill pipe. Filled hole to 40 feet with heavy mud. Dumped 1/2 sack hulls on fluid at 40 feet. Dumped 1/2 sack dry cement on hulls. Pushed 1/4 sack hulls rolled and tied on top of bridge. Cemented top of hole with 10 sacks cement. Bridge rat hole and cemented with two sacks cement three feet below ground level.

RECEIVED
STATE CORPORATION COMMISSION
FEB 2 1970
CONSERVATION DIVISION
Wichita, Kansas
02-02-70

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor American Drilling Corporation
Address 360 Sutton Place Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Larry G. Stephenson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Larry G. Stephenson

360 Sutton Place Wichita, Kansas


(Address)

30 3rd day of January 1970

Marjorie J. Stephenson

Notary Public.

July 25, 1972



15-167-20386-00-00

COMPANY:

Saline Basin Petroleum Co.

CONTRACTOR:

American Drilling Corporation

FARM:

Kline "B-B"

LOCATION:

SE SE SW (Approx.) Russell County
Section: 16-14S-11W

COMMENCED:

12-30-69

COMPLETED:

1-10-70

RECEIVED
STATE CORPORATION COMMISSION
FEB 2 1970
CONSERVATION DIVISION
Wichita, Kansas


0	-	40	Gumbo & Sand
40	-	268	Shale, Post Rock, & Iron
268	-	400	Shale Sand Streaks
400	-	485	Red Bed
485	-	552	Red Bed & Shale
552	-	587	Anyhydrite
587	-	1248	Shale
1248	-	1307	Shale & Lime
1307	-	1510	Lime
1510	-	2740	Lime & Shale
2740	-	2969	Lime
		2969	Total Depth

Set 268 feet of 8 5/8" surface pipe w/ 170 sacks of Sunset Cement

Dry and Abandoned

CERTIFICATE

I, Larry G. Stephenson, do hereby certify that the above and foregoing is a true and correct copy of the drillers log of the Kline 1-B, Section 16-14S-11W, Russell County, Kansas as reflected by files of the American Drilling Corporation.


Larry G. Stephenson