


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

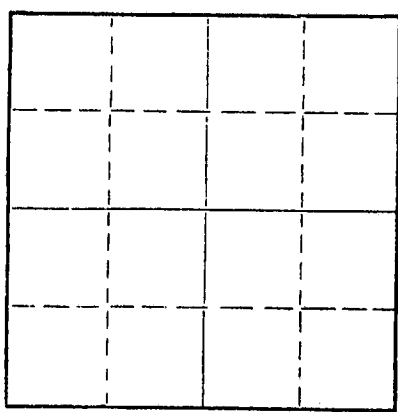

Locate well correctly on above
Section Plat

Russell County. Sec. 7 Twp. 14S Rge. 11W (E) (W)
Location as "NE/CNWxSWx" or footage from lines SW NW NE
Lease Owner Frontier Oil Company
Lease Name Beisel "A" Well No. 1
Office Address 1720 Wichita Plaza, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed May 20, 19 64
Application for plugging filed May 20, 19 64
Application for plugging approved May 20, 19 64
Plugging commenced May 20, 19 64
Plugging completed May 20, 19 64
Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3276 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	240'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole up to 230', set plug
1/2 sx hulls & 25 sx cement. Filled
hole up to 40', set plug 1/2 sx hulls
& 10 sx cement. 2 sx cement in
rathole.

RECEIVED
STATE CORPORATION COMMISSION

MAY 27 1964

05-27-64
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Red Tiger Drilling Company
Address Box 173 -- Russell, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Maxine V. Head (employee of owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Maxine V. Head

1720 Wichita Plaza, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 26th day of May, 19 64



Jean Hollas
Notary Public.

DRILLERS LOG

No. 1 Beisel "A"

CASING RECORD:	COMPANY:	Frontier Oil Company	DESCRIPTION:
8 5/8" @ 240'	CONTRACTOR:	Red Tiger Drilling Co.	SW NW NE
w/170 sx cement	COMMENCED:	May 14, 1964	7-14S-11W
	COMPLETED:	May 20, 1964	Russell Co., Ks.
			ELEVATION:
			1750 DF
TOTAL DEPTH: 3276'			1753 RB

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay & Post Rock	0	40	
Shale & Shells	40	240	
Shale, Shells & Pyrite	240	440	
Shale & Red Bed	440	609	
Anhydrite	609	643	
Red Bed & Shale	643	1050	
Red Bed, Shale & Shells	1050	1305	
Shale & Lime	1305	2695	
Lime	2695	2760	
Lime & Shale	2760	2890	
Lime	2890	3262	
Lime & Sand	3262	3276	

RECEIVED
STATE CORPORATION COMMISSION
MAY 27 1964
CONSERVATION DIVISION
Wichita, Kansas


I certify that this is a true and correct copy of the above log to the best of my knowledge.

FRONTIER OIL COMPANY

Maxine V. Head
Maxine V. Head

Subscribed and sworn to before me this 26th day of May, 1964.

John Hollan
Notary Public



My Commission Expires:
5-22-66