


15-051-00453-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

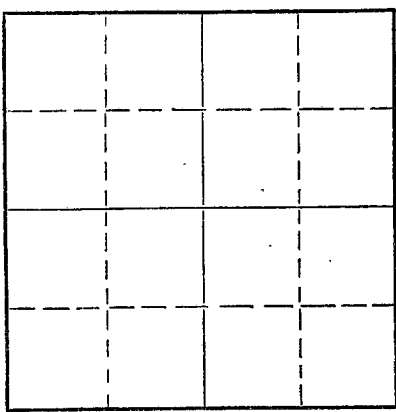

Locate well correctly on above
Section Flat

Ellis County. Sec. 3 Twp. 14S Rge. 16 (E) (W)
Location as "NE/CNW%SW%" or footage from lines NE NE NW
Lease Owner Shields Oil Producers
Lease Name Elizabeth Herman Well No. 1
Office Address 830 Main - Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed April 11, 19 54
Application for plugging filed April 11, 19 54
Application for plugging approved April 11, 19 54
Plugging commenced April 11, 19 54
Plugging completed April 11, 19 54
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well 3500 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	260'	cemented

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy Mud to 250'
1/2 sack hulls and 8 5/8" bridging plug at 250'
15 sacks cement through 4 1/2" drill pipe at 250'
Heavy Mud to 40'
1/2 sack hulls and 8 5/8" bridging plug at 40'
10 sacks cement on plug to surface

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Company, Inc.
Address Box 248 - Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
H. E. Reiss (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. E. Reiss
Box 248 - Russell, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 17th day of April, 19 54



Jo Anne Logsdon Notary Public.

PLUGGING
FOR SEC 3 T 14 R 16W
BOOK PAGE 27 LINE 15

04-19-54
CONSERVATION DIVISION

WELL LOG

**Shields Oil Producers
Herman #1**

**NE/4 NE/4 NW/4
Sec. 3, Twp. 14S, Rge. 16W
Ellis County, Kansas**

**Total Depth: 3500'
Commenced: March 28, 1954
Completed: April 11, 1954
Drilled by Shields Drlg. Co., Inc.**

CASING RECORD

Size	Run	Pulled
8 5/8"	260'	Cmt'd. w/ 150 sax

**Elevation: 1954 RB
Production: D & A**

- - - - - Figures Indicate Bottom of Formations - - - - -

Top Soil	15
Sand	35
Shale	255
Red Bed, Sand, & Shale	560
Sand	700
Shale	705
Red Bed & Shells	735
Red Bed	1046
Anhydrite Lime	1090
Shale & Shells	1350
Shale, Shells & Salt	1520
Shale	1760
Lime & Shale	1935
Lime	1980
Lime & Shale	2345
Shale	2415
Lime & Shale	2465
Shale	2720
Lime & Shale	2790
Shale	2888
Lime & Shale	3035
Lime	3064
Lime & Shale	3147
Lime	3148
Shale	3151
Lime & Shale	3230
Lime	3245
Lime & Shale	3291
Lime	3463
Conglomerate	3466
Shale	3500

TOPS

Anhydrite	1045	Lansing -K. C.	3195
Topeka	2925	B/K. C.	3432
Heebner	3148	Conglomerate	3449
Toronto	3170	R T D	3500

NOTES

**DST 3197-3230 Open 1 hr. Weak Blow. Rec. 35' V Slightly OCM
 90 # BHP**

**DST 3428-3463 Weak blow for 3 min. Rec. 6' Rotary Mud.
 BHP 30#**

PLUGGING

DATE 2-14-64

BOOK PAGE 27 LINE 15