


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Ellis County, Sec. 1 Twp. 14 Rge. (E) 16 (W)

Location as "NE/CNW&SW&" or footage from lines SW NW NW  
Lease Owner Wilkinson Drilling, Inc.  
Lease Name SCHULTE Well No. 1  
Office Address 805 Union Center, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry  
Date well completed May 20, 19 64  
Application for plugging filed verbally May 19, 19 64  
Application for plugging approved verbally May 20, 19 64  
Plugging commenced May 20, 19 64  
Plugging completed May 20, 19 64  
Reason for abandonment of well or producing formation Dry

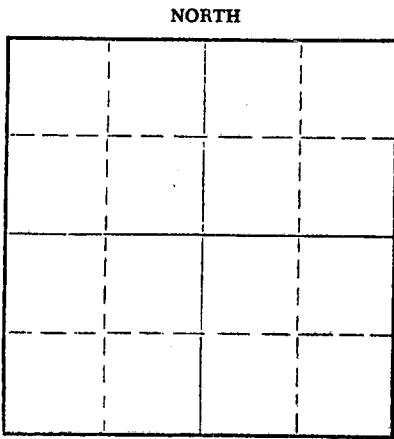

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well  
Producing formation Depth to top Bottom Total Depth of Well 3447 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	209'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set 1st Plug at 480' w/ 20 s x cement  
Set 2nd Plug at 180' w/ 20 sx cement  
Set 3rd plug at 40' w/ 8 sx cement  
2 sx cement in rat hole.

RECEIVED  
STATE CORPORATION COMMISSION


MAY 28 1964

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Abercrombie Drilling, Inc.  
Address 801 Union Center, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss: contractor  
B. Lynn Herrington (employee of ~~owner~~ / ~~owner~~ / ~~operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) B. Lynn Herrington  
801 Union Center, Wichita, Kansas 67202  
(Address)



SUBSCRIBED AND SWORN to before me this 27th day of May, 19 64  
Leah Faye Hefke  
Notary Public.

CONTRACTOR'S WELL LOG

COMPANY: Wilkinson Drilling, Inc.  
 CONTRACTOR: Abercrombie Drilling, Inc.  
 FARM: #1SCHULTE  
 LOCATION: SW NW NW Sec. 1-14S-16W  
 Ellis County, Kansas  
 COMMENCED: May 9, 1964  
 COMPLETED: May 20, 1964

0	120	Shale
120	220	Shale & Sand
220	771	Shale, Shells & Sand
771	1021	Shale & Red Bed
1021	1069	Anhydrite
1069	1720	Shale & Shells
1720	1979	Lime & Shale
1979	2115	Lime
2115	2215	Lime & Shale
2115	2350	Lime
2350	3000	Lime & Shale
3000	3108	Lime
3108	3184	Lime & Shale
3184	3407	Lime
3407	3447	Lime & Chert
	3447	Rotary Total Depth

**RECEIVED**  
 STATE CORPORATION COMMISSION  
 MAY 28 1964  
 CONSERVATION DIVISION  
 Wichita, Kansas

ELEVATION: 1925' G. L.  
 1931' D. F. & K. B.  
 TOPS: Arbuckle 3436' (-1505)

Set 8-5/8" at 209' w/140 sx cement, 2% CC.

DRY & ABANDONED

STATE OF KANSAS )  
 ) SS  
 COUNTY OF SEDGWICK )

I, B. Lynn Herrington, do hereby certify that the above and foregoing is a true and correct copy of the log of the SCHULTE #1, SW NW NW, Section 1-14-16W, Ellis County, Kansas, as reflected by the files of Abercrombie Drilling, Inc.

B. Lynn Herrington  
 B. Lynn Herrington

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 27th day of May, 1964.

Leah Faye Hefke  
 Leah Faye Hefke, Notary Public

My commission expires June 16, 1967.

