


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

15-051-19282-00-00

WELL PLUGGING RECORD

NORTH



Locate well correctly on above
Section Plat

Ellis County. Sec. 1 Twp. 14S Rge. 16W ~~(XX)~~ (W)
Location as "NE/CNW/SW" or footage from lines. NE SE SE
Lease Owner Jim Ralstin
Lease Name Schulte Well No. 1
Office Address 305 Orpheum Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed April 11, 19 61
Application for plugging filed April 11, 19 61
Application for plugging approved April 11, 19 61
Plugging commenced April 11, 19 61
Plugging completed April 11, 19 61
Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	254.15'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud to 480'. Set bottom plug with 20 sx cement. Fill with heavy mud to 180' and cement middle plug with 20 sx. Fill hole to 40' and cement to surface.

RECEIVED
STATE CORPORATION COMMISSION
APR 14 1961 04-14-61
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Red Tiger Drilling Company
Address Box 173 - Russell, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
George A. Angle (explorer or owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) George A. Angle
580 Fourth National Bank Building, Wichita,
(Address) Kansas

SUBSCRIBED AND SWORN to before me this 12th day of April, 19 61

My commission expires 1-17-62
Notary Public.

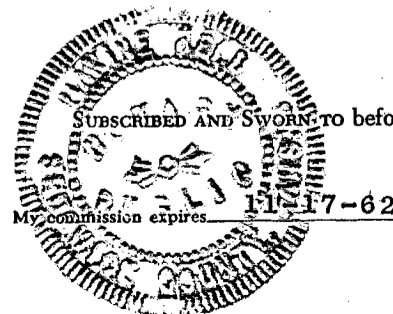

DRILLERS LOG

No. 1 Schulte

CASING RECORD: 8 5/8" @ 254.15' w/175 sx cement
 COMPANY: Jim Halstin
 CONTRACTOR: Red Tiger Drilling Company
 COMMENCED: April 3, 1961
 COMPLETED: April 11, 1961
 DESCRIPTION: NE SE SE 1-14S-16W Ellis County, Kansas
 ELEVATION: 1865 DF 1868 RB
 TOTAL DEPTH: 3414'

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Post Rock	0	40	
Sand & Shale	40	250	
Shale & Shells	250	520	
Sand	520	700	
Shale	700	961	
Anhydrite	961	1000	
Shale	1000	1020	
Shale & Shells	1020	1650	
Shale & Shells, Lime	1650	2060	
Lime & Shale	2060	3095	
Lime	3095	3414	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

George A. Angle
 George A. Angle

Subscribed and sworn to before me this 12th day of April, 1961.

Marjorie Head
 Notary Public

My Commission Expires:

11-17-82



RECEIVED
 STATE CORPORATION COMMISSION
 APR 14 1961
 CONSERVATION DIVISION
 Wichita, Kansas

DRILLERS LOG

No. 1 Schulte

CASING RECORD: 8 5/8" @ 254.15' w/175 sx cement
 COMPANY: Jim Ralstin
 CONTRACTOR: Red Tiger Drilling Company
 COMMENCED: April 3, 1961
 COMPLETED: April 11, 1961
 TOTAL DEPTH: 3414'

DESCRIPTION: NE SE SE
 1-148-10W
 Ellis
 County,
 Kansas
 ELEVATION: 1865 DF
 1868 RB

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Post Rock	0	40	
Sand & Shale	40	250	
Shale & Shells	250	520	
Sand	520	700	
Shale	700	981	
Anhydrite	981	1000	
Shale	1000	1020	
Shale & Shells	1020	1650	
Shale & Shells, Lime	1650	2060	
Lime & Shale	2060	3095	
Lime	3095	3414	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

George A. Angle
 George A. Angle

Subscribed and sworn to before me this 12th day of April, 1961.

Martin Head
 Notary Public

My Commission Expires:

11-17-62



RECEIVED
 STATE CORPORATION COMMISSION
 APR 14 1961
 CONSERVATION DIVISION
 Wichita, Kansas