


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

15-051-0118-00-00
WELL PLUGGING RECORD

NORTH

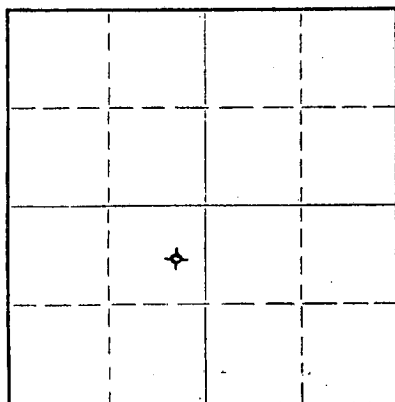

Locate well correctly on above
Section Plat

Ellis County. Sec. 1 Twp. 14S Rge. 17 (E) W (W)
Location as "NE/CNW/SW" or footage from lines E/2 NE/4 SW/4
Lease Owner Hinkle Oil Co.
Lease Name Anderson Well No. 1
Office Address 1016 Union Center, Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed February 19, 19 58
Application for plugging filed (verbal) February 19, 19 58
Application for plugging approved (verbal) February 19, 19 58
Plugging commenced February 19, 19 58
Plugging completed February 19, 19 58
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Lieker
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3501 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	217'	8-5/8"	217'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Bottom plug set at 500' with 15 sacks cement.
Middle plug set at 210' with 15 sacks cement.
Top plug set at 35' with 10 sacks cement; all
cement mixed and poured through drill pipe.
Plugging was completed under supervision of
Mr. Lieker.

RECEIVED
STATE CORPORATION COMMISSION

FEB 26 1958 02-26-58


CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Birmingham-Bartlett Drilling Co.
Address 300 Kaufman Bldg., Wichita 2, Kansas


STATE OF Kansas COUNTY OF Sedgwick
Richard Hindery, partner of Birmingham-Bartlett Drilling Co., contractor
(employee of owner or owner or operator) of the above-described
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the
above-described well as filed and that the same are true and correct. So help me God. BIRMINGHAM-BARTLETT DRILLING CO.

(Signature) By Richard Hindery Partner
300 Kaufman Bldg., Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 24th day of February, 19 58



My commission expires October 2, 1958.

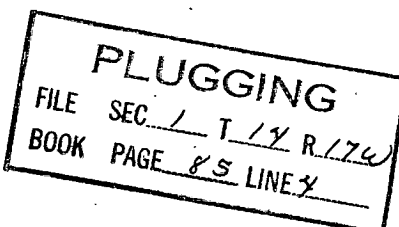

ANDERSON NO. 1 WELL

LOCATION: E/2 NE/4 SW/4
Section 1-14S-17W
Ellis County, Kansas

SPUDED: 2-10-58
COMPLETED: 2-19-58

OPERATOR: Hinkle Oil Co.
1016 Union Center, Wichita 2, Kansas

CONTRACTOR: Birmingham-Bartlett Drilling Co.
300 Kaufman Building
Wichita 2, Kansas

SURFACE CASING: 8-5/8" casing cemented at 217'
with 200 sacks cement and 4 c.c.

OIL STRING: None set. Dry and abandoned.
Plugged 2-19-58.

LOG

(Figures indicate bottom of formation.)

0 - 100	Sand and shale
525	Shale and shells
745	Sand
1095	Red bed
1132	Anhydrite
1700	Shale and shells
2980	Lime and shale
3501	Lime
3501	Rotary total depth

The undersigned, Richard Hindery, one of the partners of Birmingham-Bartlett Drilling Co., hereby certifies that the above is a true and correct log of the formations encountered in drilling the Anderson No. 1 Well as shown in the daily drilling reports.

BIRMINGHAM-BARTLETT DRILLING CO.


By Richard Hindery

Subscribed and sworn to before me
this 24th day of February, 1958.

Beverly Larson

Notary Public

My commission expires October 2, 1958.



FILED
FEB 25 1958
BOOK PAGE 85 LINE 4