15-051-22442-00-00

FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

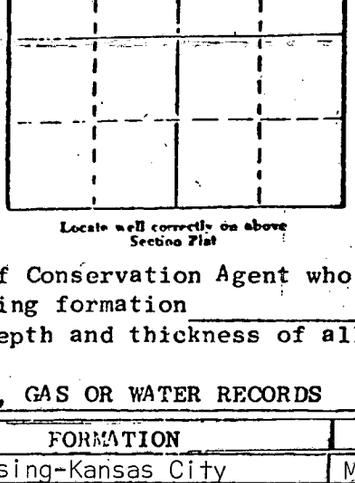

Locate well correctly on above Section Plat

WELL PLUGGING RECORD

Ellis County. Sec. 6 Twp. 14S Rge. 17 E/W

Location as "NE/CNW¼SW¼" or footage from lines SW4NW4NE4

Lease Owner Dreiling Ltd. of Colorado

Lease Name Francis Younger Well No. #1

Office Address 410 - 17th St., Denver, Colorado 80202

Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

Date Well completed June 16 19 81

Application for plugging filed June 17 19 81

Application for plugging approved June 30 19 81

Plugging commenced 12:00 A.M. June 16 19 81

Plugging completed 1:00 A.M. June 16 19 81

Reason for abandonment of well or producing formation Non-productive

If a producing well is abandoned, date of last production None 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3656

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Lansing-Kansas City	Muddy water	3360	3392	8-5/8"	280	None
Lansing-Kansas City	Drilling Mud	3392	3425			
Lansing-Kansas City	Mud	3526	3574			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set. Hole full of heavy mud--cement with 50-50 regular Portland and Poxmix, 6% gel. Total of 115 sacks. Pumped through drill pipe as follows:

Plug at 680 feet with 65 sacks
Plug at 300 feet with 30 sacks
1/2 sack of hulls-rubber plug at 40' with 10 sacks to surface
5 sacks in rat hole
5 sacks in mouse hole

RECEIVED
STATE CORPORATION COMMISSION
JUL 24 1981
CONSERVATION DIVISION
Wichita, Kansas
07-22-81

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton

STATE OF Colorado COUNTY OF Denver, ss.

Leslie Olson (employee of owner) or ~~(owner or operator)~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Olson

410 - 17th St., Suite 1140, Denver, Co. 80202
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of July, 1981

Lorraine C. Murphy
Notary Public.

My commission expires 9-2-83