


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Ellis County, Sec. 6 Twp. 14 S Rge. 17 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
Approx NW NW SE

Lease Owner A. Scott Ritchie
Lease Name Prewo Well No. 1
Office Address Suite 950, 125 No. Market, Wichita, Ks.
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

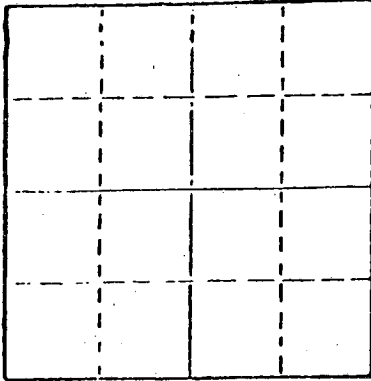

Locate well correctly on above
Section Plat

Date Well completed September 24 1977
Application for plugging filed September 24 1977
Application for plugging approved September 24 1977
Plugging commenced September 24 1977
Plugging completed September 24 1977
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production
1977

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3590
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Hole full of heavy mud to 500' w/50 sacks 50/50 Pozmix, thru drill pipe.
Mud to 215' w/25 sacks 50/50 Pozmix thru drill pipe
Mud to 40' w/ $\frac{1}{2}$ sack hulls plug and 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

SEP 29 1977

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Duke Drilling Co.


STATE OF KANSAS COUNTY OF BARTON, ss.
Larry Curtis (employee of owner) or (~~owner or operator~~)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Larry Curtis
Box 823, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of September, 1977

My commission expires April 11, 1978
Dorothy M. Hague Notary Public.



DRILLERS' WELL LOG

DATE COMMENCED: September 16, 1977
DATE COMPLETED: September 24, 1977

A. Scott Ritchie
"PREWO # 1"
Approx NW NW SE
Sec 6-T14S-R17
Ellis County, Kansas

0 - 216' Post Rock and Shale
216 - 865' Shale and Sand
865 - 1219' Red Bed
1219 - 1266' Anhydrite
1266 - 1290' Red Bed
1290 - 2993' Shale and Lime
2993 - 3260' Lime
3260 - 3264' Shale
3264 - 3283' Lime and Shale
3283 - 3524' Lime
3524 - 3538' Lime and Shale
3538 - 3590' Dolomite
3590' RTD

ELEVATION: 2013 K.B.

FORMATION TOPS

Anhydrite 1219
Topeka 2993
Haebner 3260
Toronto 3283
Lansing 3303
Base K.C. 3524
Arbuckle 3538
RTD 3590

RECEIVED
STATE COOPERATION COMMISSION

SEP 29 1977

CONSERVATION DIVISION
Wichita, Kansas

SURFACE PIPE:

Set used 8 5/8", 28# pipe at
216' w/125 sacks Common, 2% Gal,
3% cc.

A F F I D A V I T

STATE OF KANSAS)
COUNTY OF BARTON) ss.

Larry Curtis, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Larry Curtis

Subscribed and sworn to before me this 27th day of September, 1977.

Deborah M. Hague
Notary Public

My Commission Expires: April 11, 1978

