


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Ellis County, Sec. 6 Twp. 14S Rge. 17W (X) (W)

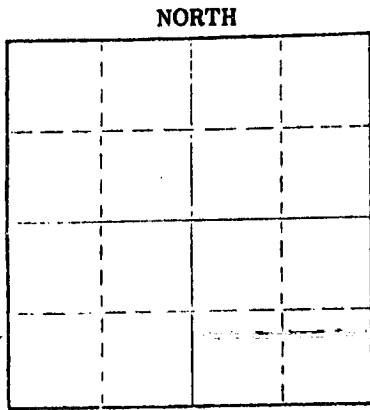

Location as "NE/CNVKSWK" or footage from lines NW SE NE
Lease Owner Al Tipton
Lease Name YOUNGER T Well No. 1
Office Address Box 157, Hays, Kansas 67601
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed November 12 19 75
Application for plugging filed November 12 19 75
Application for plugging approved November 12 19 75
Plugging commenced November 12 19 75
Plugging completed November 12 19 75
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 3580' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug @ 500' w/50 sacks 50/50 Pozmix, 2% Gel thru drill pipe
Plug @ 240' w/25 sacks 50/50 Pozmix, 2% GEL thru drill pipe.
Plug @ 40' w/1/8" sach hulls and 10 sacks cement.


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Duke Drilling Co.
Address Box 823, Great Bend, Kansas 67530

STATE OF KANSAS COUNTY OF BARTON ss.
Wayne Dobbs (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wayne Dobbs
Box 823, Great Bend, Kansas 67530 (Address)

swORN TO before me this 13th day of November, 19 75
April 11, 1978
Notary Public.



RECEIVED
STATE CORPORATION COMMISSION
NOV 14 1975
11-14-75
CONSERVATION DIVISION
Wichita, Kansas

15-051-2119-00-00

DRILLERS' WELL LOG

DATE COMMENCED: November 6, 1975
DATE COMPLETED: November 12, 1975

Al Tipton
YOUNGER T-1
NW SE NW
Sec. 6-T14S-R17W
Ellis County, Kansas

ELEVATION: 2012 K.B.

0 - 221'	Shale, Sand
221 - 535'	Shale, Shells, Sand Streaks
535 - 1000'	Shale, Sand
1000 - 1222'	Red Bed
1222 - 1258'	Anhydrite
1258 - 1758'	Shale, Shells
1758 - 3254'	Lime, Shale
3254 - 3258'	Shale
3258 - 3300'	Lime, Shale
3300 - 3516'	Lime
3516 - 3527'	Lime, Shale
3527 - 3580'	Shale, Lime, Chert
3580'	RTD

FORMATION TOPS

Anhydrite	1222
Heebner	3254
Toronto	3278
Lansing	3300
Base K.C.	3516
Cong.	3527
RTD	3580

SURFACE PIPE:
set 221' of used 28#, 8 5/8"
pipe w/130 sacks Common, 2% Gel,
3 3/8 cc.

RECEIVED
STATE CORPORATION COMMISSION

NOV 14 1975

CONSERVATION DIVISION
Wichita, Kansas

A F F I D A V I T

STATE OF KANSAS)
COUNTY OF BARTON) ss.

Wayne Dobbs, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Wayne Dobbs

Subscribed and sworn to before me this 13th day of November, 1975.

Shirley M. Hague
Notary Public



Commission Expires: April 11, 1978