


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Ellis County. Sec. 7 Twp. 14 Rge. 17 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
NW NE NE

Lease Owner A. Scott Ritchie
Lease Name Younger Well No. 1
Office Address 950 Suite, 125 No. Market, Wichita, Ks.
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

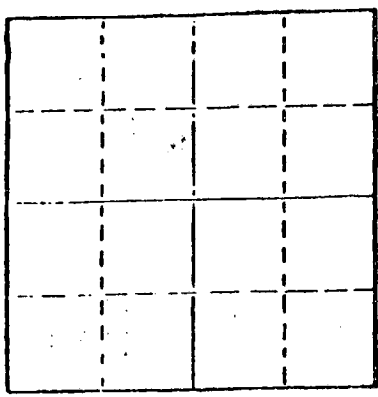

Date Well completed January 14 1977
Application for plugging filed January 14 1977
Application for plugging approved January 14 1977
Plugging commenced January 14 1977
Plugging completed January 14 1977

Reason for abandonment of well or producing formation Dry Hole
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3584
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Bottom plug at 500' w. 50 sacks cement thru drill pipe.
Middle plug at 185' w/25 sacks cement thru drill pipe.
Top plug at 40' w/1/2 sack hulls and 10 sacks cement.
2 sacks cement in rat hole.

RECEIVED
STATE CORPORATION COMMISSION

JAN 20 1977 01-20-77

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Duke Drilling Co.

STATE OF KANSAS COUNTY OF BARTON, ss.
Leonard Williamson (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leonard Williamson
Box 823, Great Bend, Kansas 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 18th day of January, 1977



Dorothy M. Hague
Notary Public.

DRILLERS' WELL LOG

15-051-21252-0000

DATE COMMENCED: January 4, 1977
DATE COMPLETED: January 14, 1977

A. Scott Ritchie
"YOUNGER # 1"
NW NE NE
Sec 7-T14-R17
Ellis County, Kansas

0 - 212'	Surface Soil, Shale, Sand Streaks
212 - 635'	Shale, Red Bed, Sand Streaks
635 - 838'	Sand
838 - 1190'	Shale, Red Bed
1190 - 1232'	Anhydrite
1232 - 1260'	Shale
1260 - 1980'	Shale, Shells
1980 - 2966'	Lime and Shale
2966 - 3230'	Lime
3230 - 3234'	Shale
3234 - 3273'	Lime and Shale
3273 - 3501'	Lime
3501 - 3513'	Lime and Shale
3513 - 3584'	Dolomite
3584'	RTD

ELEVATION: 1989 K.B.

FORMATION TOPS

Anhydrite	1190
Topeka	2966
Heebner	3230
Kansas City	3273
Base K.C.	3501
Arbuckle	3513
RTD	3584

SURFACE PIPE:

Set used 8 5/8", 28# pipe
at 211' w/140 sacks Common,
2% Gel, 3% cc.

A F F I D A V I T

STATE OF KANSAS }
COUNTY OF BARTON } ss.

Leonard Williamson, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Leonard Williamson

Subscribed and sworn to before me this 18th day of January, 1977.

Maureen M. Hague
Notary Public

My Commission Expires April 11, 1978

