

15-0TH - 20064 - 00 - 00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Greeley County. Sec. 11 Twp. 185 Rge. 40 (E) W (W)

Location as "NE/CNW/SW" or footage from lines. 1980' FN & FWL

Lease Owner Phillips Petroleum Company

Lease Name Byerly "A" Well No. 1

Office Address Box 358

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed November 29, 19 74

Application for plugging filed *November 29, 19 74

Application for plugging approved November 29, 19 74


Plugging commenced November 30, 19 74

Plugging completed November 30, 19 74

Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production NA 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

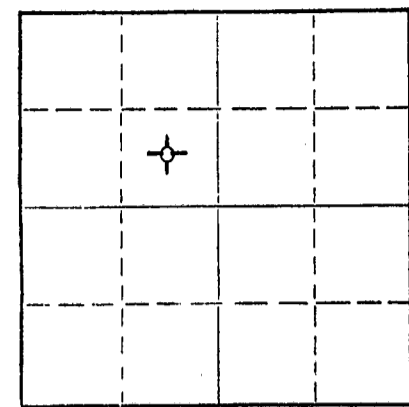

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Clarence Thomas

Producing formation None Depth to top --- Bottom --- Total Depth of Well 4,250 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
No gas or oil producing formations				8 5/8	1422	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Spotted 60 sxs. cmt. (2850--2975)-50 sxs. cmt. (900-1000') 35 sxs. (550-650) & 15 sxs. cmt. (32-45).

RECEIVED
STATE CORPORATION COMMISSION

JAN 9 1975
1-9-75
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Service Drilling Company

Address 406 S. Boulder, Tulsa, Oklahoma

STATE OF Texas, COUNTY OF Hutchinson, ss.

D. R. Weston (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) D. R. Weston

Box 358, Borger, Texas
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of January, 19 75.

My commission expires June 1, 1975
Ernestine Alexander
Notary Public.

*Initial telephone request

PHILLIPS PETROLEUM COMPANY

BYERLY "A" NO. 1 WELL
Greeley County, Kansas

COMMENCED OPERATIONS: 11/20/74

COMPLETED OPERATIONS: 11/30/74

DRILLERS LOG

11/20/74	0 - 1135	Sand & Shale.
11/21/74	1135 - 1436	Shale, Shells & Anhydrite.
11/22/74	1436 - 1876	Shale & Gypsum.
11/23/74	1876 - 2685	Shale & Sand.
11/24/74	2685 - 2928	Shale & Lime.
11/25/74	2928 - 3340	Shale & Lime.
11/26/74	3340 - 3686	Lime.
11/27/74	3686 - 4002	Lime & Shale.
11/28/74	4002 - 4135	Lime & Shale.
11/29/74	4135 - 4250	Lime.

CASING RECORD

11/22/74 Ran 34 Jts. of 8-5/8" new 24# casing. Set at 1430 K.B. Cemented with 650 sacks Howco Lite, 2% c.c. and 200 sacks Common, 3% c.c.

11/30/74 Set plugs: 60 sacks from 2975' to 2850' lay down pipe to 1000'. Set 50 sacks at 1000' to 900' lay down pipe to 600'. Set plug from 650' to 550' laying down pipe to surface. Set 40' Plug top surface with 15 sacks.

RECEIVED
STATE CORPORATION COMMISSION

JAN 9 1975

CONSERVATION DIVISION
Wichita, Kansas