

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

R
WELL PLUGGING RECORD

Russell County. Sec. 14 Twp. 14s Rge. 14 (E) W (W)

Location as "NE/CNW%SW%" or footage from lines NE/2 SW SW

Lease Owner Duke Drilling Company

Lease Name Jones Well No. 1

Office Address P.O. Box 123 - Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) dry hole

Date well completed July 28 19 60

Application for plugging filed October 25 19 60

Application for plugging approved October 27 19 60


Plugging commenced 11 - 2 19 60

Plugging completed 11 - 4 19 60

Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production _____ 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

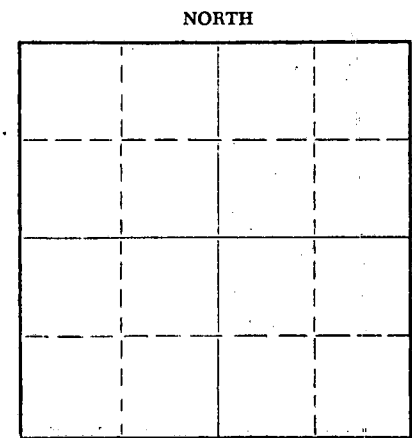

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Truen

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|------|--------|------------|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with sand from 2350' to 2330'. Mixed and dumped 4 sacks cement from 2330' to 2282'. Pulled casing. Mudded to 310'. Set 10' rock bridge from 310' to 300'. Mixed and dumped 20 sacks cement from 300' to 200'. Mudded hole from 200' to 60'. Set 10' rock bridge from 60' to 50'. Mixed and dumped 10 sacks from 50' to base cellar.

RECEIVED
STATE CORPORATION COMMISSION
NOV 29 1960 11-28-60
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Ace Pipe Pulling Co.

Address P.O. Box 304 - Great Bend, Ks.

STATE OF KANSAS, COUNTY OF BARTON, ss.

Lewis O. Chubb (employee of owner) or (~~operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Lewis O. Chubb
P.O. Box 123 - Great Bend, Kansas
(Address)



SUBSCRIBED AND SWORN TO before me this 25th day of November, 19 60

Clair E. Stinson
Notary Public.

My commission expires June 24 - 1963

WELL LOG

Date Commenced July 22, 1960
Date Completed July 28, 1960

Duke Drilling Company
Jones # 1
150' North of SW SW SW
Section 14-14S-13W
Stafford County, Kansas

| | |
|---------------|--------------------------|
| 0' - 80' | Surface Clay & Post Rock |
| 80' - 95' | Sand |
| 95' - 305' | Shale & Sand |
| 305' - 440' | Sand |
| 440' - 450' | Anhydrite white |
| 450' - 755' | Red Bed |
| 755' - 799' | ANHYDRITE |
| 799' - 1210' | Shale & Shells |
| 1210' - 1340' | Salt & Shale |
| 1340' - 1515' | Shale & Shells |
| 1515' - 1765' | Lime & Shale |
| 1765' - 1925' | Lime |
| 1925' - 2339' | Lime & Shale |
| 2339' - 2353' | Shale & Sand |

ELEVATION 1825 KB

FORMATION TOPS

| | | |
|-------------|------------|-------|
| ANHYDRITE | 755 to 799 | +1070 |
| GRANDHAVEN | 2328 | - 503 |
| TARKIO SAND | 2341 | - 516 |

Surface Casing:
Set 7" used @ 463' with
150 sacks cement by Sun.

Production Casings:
Set 4 1/2" new @ 2353' with
50 sacks cement by Sun.

STATE OF KANSAS

STATE OF KANSAS)
COUNTY OF BARTON) ss.

RECEIVED
STATE OF KANSAS
NOV 28 1960
COMMISSIONER OF REVENUE

I, Lewis O. Chubb, Geologist, do swear that the statements and
matters herein contained are true to the best of my knowledge.

Lewis O. Chubb
Geologist

Subscribed and sworn to before me this 31st day of August, 1960.



Chas E. Stensow
Notary Public

My Commission Expires: June 24, 1963.