

15-167-20580-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Russell County, Sec. 19 Twp. 14S Rge. 15W (E) (W) X

Location as "NE/CNW/SW" or footage from lines NW SW NW
Lease Owner Clinton Oil Company
Lease Name #1 "V" Janne Well No. #1
Office Address 217 North Water, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) D&A
Date well completed January 21, 1973
Application for plugging filed January 25 19 73
Application for plugging approved January 25 19 73
Plugging commenced January 21 19 73
Plugging completed January 21 19 73
Reason for abandonment of well or producing formation D&A

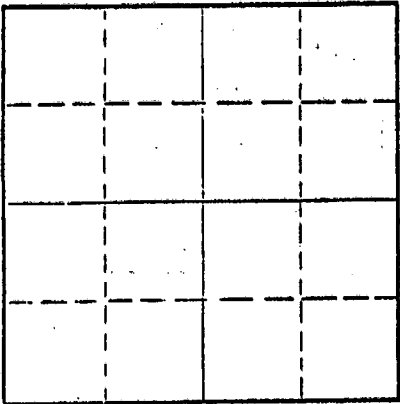

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3423 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole plugged by Halliburton
with 50-50 Pozmix 4% total
gel - 50 sx. @ 500' - 25 sx.
@ 250' - 1/2 sx. hulls and
plug @ 30' with 15 sx. to
surface.

RECEIVED
STATE CORPORATION COMMISSION
JAN 29 1973
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Red Tiger Drilling Co.
Address 1720 Wichita Plaza, Wichita, Ks. 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Robert A. Yancer (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

(Signature) Robert A. Yancer
1720 Wichita Plaza, Wichita, Ks. 67202
(Address)

Sworn to before me this 25 day of January, 19 73



Virginia K. Albert
Notary Public.

My commission expires July 23, 1974

DRILLERS LOG

No. 1 "V" Janne

CASING RECORD:	COMPANY: Clinton Oil Co.	DESCRIPTION:
10 3/4" \odot 275	CONTRACTOR: Red Tiger Drilling Co.	NW SW NW
w/225 sx 80-40	COMMENCED: January 6, 1973	10-148-15W
Pozmix, 3% HA-5	COMPLETED: January 21, 1973	Russell County
TOTAL DEPTH: 3423'		Kansas
		ELEVATION:

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surf. Soil & Sand	0	275	
Shale, Hard Sand, Sand			
Redbed	275	660	
Redbed	660	948	
Anhydrite	948	994	
Shale	994	1035	
Salt Section	1035	1460	
Shale	1460	1865	
Shale & Dolomite	1865	2000	
Lime & Shale	2000	2185	
Chalky Lime	2185	2252	
Broken Lime	2252	2347	
Lime & Shale	2347	2897	
Lime	2897	3423	

RECEIVED
STATE CORPORATION COMMISSION
JAN 29 1973
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Robert A. Yancer
Robert A. Yancer

described and sworn to before me this 26th day of January, 1973.



Virginia L. Albert
Notary Public

My Commission Expires: