


15-109-00017-00-00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Logan County, Sec. 33 Twp. 14S Rge. 37 (E) (W)

Location as "NE/CNW/SW" or footage from lines: C SW SW SW
Lease Owner: The Shamrock Oil and Gas Corp.
Lease Name: R. F. Surratt "H" Well No. 1
Office Address: Box 631, Amarillo, Texas
Character of Well (completed as Oil, Gas or Dry Hole): Dry Hole
Date well completed: July 22, 19 57
Application for plugging filed: July 22, 19 57
Application for plugging approved: July 22, 19 57
Plugging commenced: July 22, 19 57
Plugging completed: July 22, 19 57
Reason for abandonment of well or producing formation: Dry



Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production: — 19 —
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well: Eldon Betty
Producing formation: None Depth to top: — Bottom: — Total Depth of Well: 5,110 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Sand	Water	140	170	13 3/8"	291	-0-
Sand	Water	4,890	4,896			
Sand	Water	4,977	4,986			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pushed 13 3/8" OD Halliburton plug to 290'. Spotted 1/2 sacks of hulls on top of plug. Spotted 35 sacks cement from 288' to 290'. Filled hole with mud from 200' to 25'. Pushed Halliburton plug to 25'. Spotted 1/2 sack of hulls on top of plug. Filled casing with 15 sacks cement from 23' to ground level.

Name of Plugging Contractor: Halliburton Oil Well Cementing Company
Address: Great Bend, Kansas

RECEIVED
STATE CORPORATION COMMISSION

STATE OF TEXAS, COUNTY OF POTTER
T. S. Clopton (employee of owner) or (Notary Public) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) T. S. Clopton
Box 631, Amarillo, Texas

SUBSCRIBED AND SWORN TO before me this 30th day of July, 19 57

PAULINE POWELL
Notary Public

My commission expires 6-1-59

PLUGGING
FILE SEC 33 T. 14 R. 37W
BOOK PAGE 20 LINE 23

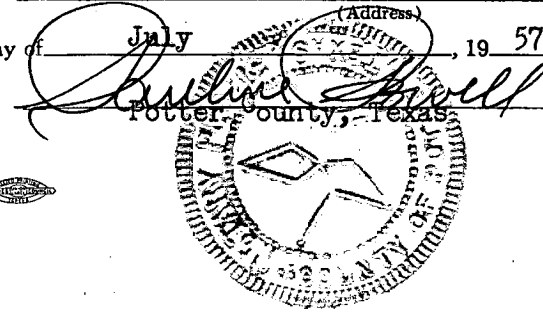

15-109-00017-00-00

THE SHAMROCK OIL AND GAS CORPORATION
R. F. SURRATT "H" NO. 1
 Section 33, Township 14S, Range 37W.
 Logan County, Kansas

0' - 170'	Surface sand
170' - 885'	Marl and shaley lime
885' - 915'	Lime
915' - 940'	Sand with lime streaks
940' - 980'	Gray shale
980' - 1,020'	Black shale
1,020' - 1,190'	Marl and shale
1,190' - 1,200'	Lime
1,200' - 1,280'	Marl
1,280' - 1,400'	Sand
1,400' - 1,425'	Shale
1,425' - 1,520'	Sand
1,520' - 1,720'	Sand and shale
1,720' - 1,765'	Sand
1,765' - 1,815'	Shale
1,815' - 1,845'	Sand
1,845' - 1,900'	Shale
1,900' - 1,950'	Shale and shaley sand stone
1,950' - 2,000'	Shale and salt streaks
2,000' - 2,040'	Shale with sand streaks
2,040' - 2,130'	Shale and anhydrite
2,130' - 2,370'	Shale with salt streaks
2,370' - 2,400'	Anhydrite
2,400' - 2,700'	Shale with sand streaks
2,700' - 2,775'	Anhydrite with dolomite streaks
2,775' - 2,865'	Sand and shale
2,865' - 2,900'	Anhydrite
2,900' - 3,100'	Shale and sand
3,100' - 3,130'	Anhydrite with dolomite streaks
3,130' - 3,250'	Shale with dolomite streaks
3,250' - 3,320'	Sand and shale
3,320' - 3,365'	Shale
3,365' - 3,375'	Lime
3,375' - 3,600'	Lime and shale
3,600' - 4,600'	Lime with shale streaks
4,600' - 4,650'	Sand and shale
4,650' - 4,875'	Lime
4,875' - 5,000'	Sand and shale
5,000' - 5,080'	Lime
5,080' - 5,085'	Dolomite
5,085' - 5,113'	Limestone with sand

PLUGGING
 FILE SEC. 33 T. 14 R. 37W
 BOOK PAGE 30 LINE 23

STATE GEOLOGICAL COMMISSION

JUL 24 1937

CONSERVATION DIVISION
 Topeka, Kansas

15-109-00017-00-00

THE SHAMROCK OIL AND GAS CORPORATION

AMARILLO, TEXAS

Ship To:
In Care Of:
Via:
F. O. B.

ORDER No. 208802

STATE CORPORATION COMMISSION
CONSERVATION DIVISION
211 NORTH BROADWAY
WICHITA, KANSAS

Req. No. 4-8865
Date 8/2/57

Mail INVOICE in QUADRUPPLICATE and BILL OF LADING to THE SHAMROCK OIL AND GAS CORPORATION, AMARILLO, TEXAS. Accompany each delivery of goods with an itemized delivery memo (not an invoice) bearing our order number. MAIL MONTHLY STATEMENT to OFFICE OF THE COMPANY at AMARILLO, TEXAS.

QUANTITY	MATERIAL	PRICE
	<p>For Plugging the R.F. Surratt "H" #1 CSW SW 33-14-37W Logan County File No. 30-23</p> <div data-bbox="324 1110 990 1369" style="border: 1px solid black; padding: 5px; transform: rotate(-5deg);"> <p>CONFIRMATION ONLY DO NOT DUPLICATE</p> </div> <div data-bbox="852 1325 1242 1498" style="border: 1px solid black; padding: 5px;"> <p>PLUGGING FILE SEC. 33 T. 14 R. 37W BOOK PAGE 30 LINE 23</p> </div> <p>CONFIRMING INVOICE</p> <p style="font-size: 2em; letter-spacing: 0.5em;">PURCHASE ORDER</p>	<p>\$ 25.00</p>

ORIGINAL

IMPORTANT! ALL INVOICES MUST SHOW ORDER NUMBER

Acknowledge receipt of this order at once, advising shipping date and any incorrectness in prices. Address all communications with references to this order to Purchasing Agent, Amarillo, Texas. NO ALLOWANCE FOR BOXING OR CARTAGE UNLESS SPECIFIED.

CHARGE TO: EW 328 - Surratt "H" #1

THE SHAMROCK OIL AND GAS CORPORATION

RECEIVED
STATE CORPORATION COMMISSION

AUG 5 1957

CONSERVATION DIVISION
Wichita, Kansas

By

J. C. Wilkerson
J. C. Wilkerson