


15-169-20070.0000

*Rec'd
09-24-1975*

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

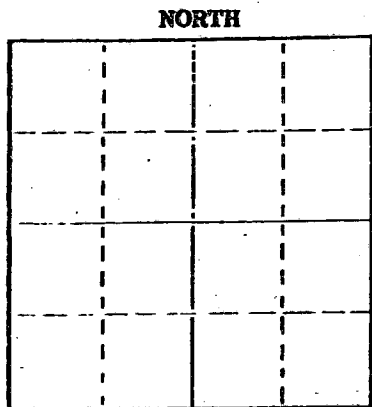

Locate well correctly on above Section Plat

Saline County. Sec. 22 Twp. 14 Rge. 2 (E) (W)
Location as "NE/CNWSW" or footage from lines @ SE SW NW
Lease Owner Hutchinson's Oil Company
Lease Name Thelander Well No. 1
Office Address 1223 Union Nat'l Bldg. Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 9-15 19 75
Application for plugging filed 9-15 19 75
Application for plugging approved 9-15 19 75
Plugging commenced 9-15 19 75
Plugging completed 9-15 19 75
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production 19 _____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert J. Toman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3400 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
STATE Rock and Soil	Surface	0	153'	7"	147.8'	None
SEP 24 1975						
CONSERVATION DIVISION Wichita, Kansas						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with mud to 150', pushed in plug and put in 20 sacks of cement. Filled hole to 40' with mud, pushed in plug, and added 10 sacks of cement. Put 2 sacks of cement in the rat hole.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor EDCO Drilling Company
Address P. O. Box 471 El Dorado, Kansas 67042

STATE OF Kansas COUNTY OF Butler
R. K. Teichgraber (employee of owner) or (owner or operator) of the above described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.


(Signature) *R. K. Teichgraber*
R. K. Teichgraber
P. O. Box 471 El Dorado, Kansas 67042
(Address)

Subscribed and Sworn to before me this 23 day of Sept. 19 75

My commission expires Sept. 16, 1978

Hazel B. Lynch
Hazel B. Lynch Notary Public

HAZEL B. LYNCH
STATEWIDE NOTARY
BUTLER COUNTY, KANSAS



E.D.C.O. Inc.

P.O. BOX 471
EL DORADO, KANSAS

67042

15-169-20070-00-00

September 16, 1975

To: Hutchinson's Oil Company
1223 Union National Building
Wichita, Kansas 67042

Lease: Thelander #1

Location C-SE-SW-NW Sec. 22, Twp. 14S, Rg. 2W
Saline County, Kansas

Drilling Dates: September 5 - 15, 1975

DRILLING LOG

140'	Rock and Soil
153'	Surface Hole
280'	Lime and Shale
300'	Shale and Shells
820'	Lime with Shale Streaks
1525'	Shale and Lime
1656'	Topeka
1894'	Lime mixed with Shale
2008'	Shale and Lime Streaks
2120'	Kansas City Lime
2296'	Lime with Shale Streaks
2442'	Shale mixed with Lime
2662'	Shale with Lime Streaks
2842'	Mississippi
2852'	Shale
2900'	Shale mixed with Lime
3011'	Shale
3110'	Hunton Lime
3144'	Sylvan
3230'	Shale
3388'	Viola Lime
3400'	Simpson R.T.D.

RECEIVED
STATE CORPORATION COMMISSION

SEP 24 1975
09-24-1975
CONSERVATION DIVISION
Wichita, Kansas