


15-169-00422-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

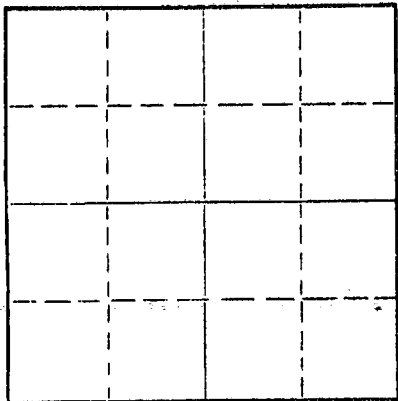

Locate well correctly on above
Section Plat

Saline County. Sec. 21 Twp. 14 Rge. 2W (E) (W)
Location as "NE/CNW/SW" or footage from lines C SW/4 NW/4
Lease Owner Cal Jones
Lease Name Weiss Well No. I
Office Address P.O. Box 5 Canota, Kansas 67428
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 5-I 19 63
Application for plugging filed 8-9 19 72
Application for plugging approved 8-10 19 72
Plugging commenced 8-18 19 72
Plugging completed 8-21 19 72
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Tenan
Producing formation Depth to top Bottom Total Depth of Well 3275' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		2,697'

RECEIVED
STATE CORPORATION COMMISSION
AUG 25 1972
08-25-1972
CONSERVATION DIVISION
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged off bottom of hole with sand. Sand from 3275' to 3260'. Dumped 5 sx of cement. Mudded hole 215'. Made 15' of rock bridge. Dumped 3 Yrds. of Ready-Mix Cement, filling to the bottom of the collar.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Art Lamb Casing Pulling Co.
Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas, COUNTY OF Reno, ss.
Art Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Art Lamb
2809 King St Hutchinson, Kansas 67501
(Address)

SUBSCRIBED AND SWORN to before me this 21 st day of August 19 72

My commission expires



Judy Lamb
Notary Public.

WELL RECORD

15-169-00422-00-00

LEASE: Weiss WELL NO. 1

LOCATION: Center SW/4 NW/4
Sec. 21-14S-2W
Saline County, Kansas

COMMENCED: 5/1/63
COMPLETED: 5/9/63
(rotary)

OPERATOR: Cal Jones
Canton, Kansas

CONTRACTOR: Melland Drilling Company, Inc.
1111 North Main Street
Hutchinson, Kansas

RECEIVED
STATE CORPORATION COMMISSION
AUG 10 1972
08-10-1972
CONSERVATION DIVISION
Wichita, Kansas

CASING RECORD: 8-5/8" at 156' with 100 sacks.
5-1/2" at 3275' with 75 sacks.

FORMATION

LOG

Surface soil, clay & sand	30	
Shale & shells	118	
Anhydrite	159	
Lime & shale	850	
Shale & shells	1525	
Lime & shale	1709	
Shale & shells	2003	
Lime	2075	
Lime & shale	2625	
Shale & shells	2675	
Mississippi Lime	2866	
Lime	2880	
Shale	3020	
Hunton Lime	3150	
Shale	3210	
Lime	3275	TOTAL DEPTH

RECEIVED
STATE CORPORATION COMMISSION
AUG 10 1972
CONSERVATION DIVISION
Wichita, Kansas