


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

NORTH

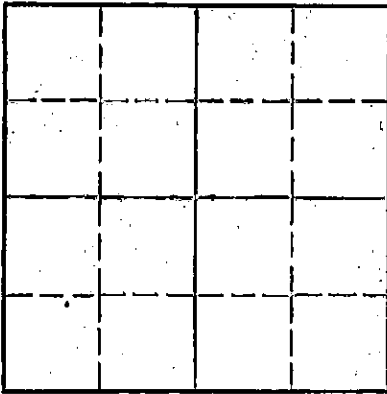

Locate well correctly on above  
Section Plat

Ellis County, Sec. 29 Twp. 14 Rge. (E) 18 (W)  
Location as "NE¼NW¼SW¼" or footage from lines CW½ SW½ SE½  
Lease Owner Darby Petroleum Corporation  
Lease Name Penny Well No. 1  
Office Address 1015 Philtower, Tulsa, 3, Oklahoma.  
Character of Well (completed as Oil, Gas or Dry Hole) Dry.  
Date well completed November 10, 1943. 19  
Application for plugging filed November 17, 1943. 19  
Application for plugging approved 19  
Plugging commenced November 10, 1943. 19  
Plugging completed November 10, 1943. 19  
Reason for abandonment of well or producing formation Dry hole.

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes.

Name of Conservation Agent who supervised plugging of this well C. T. Alexander  
Producing formation Depth to top Bottom Total Depth of Well 3714 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 1/4"	1163.13"	None.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole filled with mud from 3714' to 300', permanent bridge  
at 300' with 50 sacks cement to 255', filled with mud from  
255' to 26' and cement to 6', mud to surface.

(See reverse side for formation record)



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Darby Petroleum Corporation,  
Address 1015 Philtower Building,  
Tulsa, 3, Oklahoma.

STATE OF Oklahoma COUNTY OF Tulsa, ss.

W. H. Barclay (employee of owner) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-  
described well as filed and that the same are true and correct. So help me God.

(Signature) W. H. Barclay  
1015 Philtower Bldg., Tulsa, 3, Oklahoma.  
(Address)

SUBSCRIBED AND SWORN to before me this 17th day of November, 1943.

J. E. [Signature]  
Notary Public.

My commission expires March 1, 1946.

FORMATION RECORD

	<u>FROM</u>	<u>TO</u>
Shale	0	300
Shale & sand	300	845
Sand	845	925
Red bed	925	1044
Shale & red bed	1044	1142
Anhydrite	1142	1151
Shale & lime	1151	1200
Red bed	1200	1245
Anhydrite	1245	1300
Shale & shells	1300	1650
Salt	1650	1880
Shale	1880	1870
Shale & shells	1870	1960
Shale & lime	1960	2125
Shale & shells	2125	2160
Lime shells	2160	2200
Lime & shale	2200	2325
Lime	2325	2370
Shale & lime	2370	2380
Lime	2380	2400
Lime & shale	2400	2455
Shale	2455	2475
Lime & red bed	2475	2510
Lime & shale	2510	2700
Shale	2700	2725
Shale & shells	2725	2835
Shale & lime	2835	2880
Shale	2880	3065
Topeka Lime	3065	3100
Lime	3100	3255
Shale & shells	3255	3270
Lime & shale	3270	3300
Shale	3300	3326
Lime	3326	3415
Lime & shale	3415	3465
Lime & chert	3465	3595
Lime & shale	3595	3714 T.D.

Dry and abandoned.