

STATE OF KANSAS
 STATE CORPORATION COMMISSION
 200 Colorado Derby Bldg.
 Wichita, Kansas 67202


Form CP-4
 Rev. 12-15-80

WELL PLUGGING RECORD

15-051-02911-00-00

Give All Information Completely
 Make Required Affidavit

COUNTY Ellis SEC. 36 TWP. 13S RGE. 20W E/W
 Location as in quarters or footage from lines:
200' south of NE NE NW

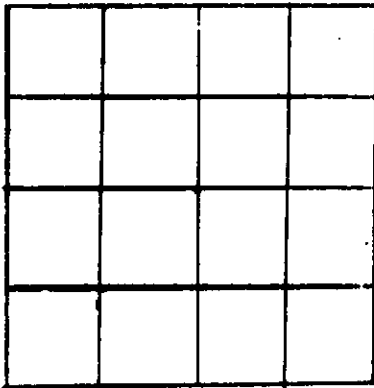

Locate Well
 correctly on above
 Section Platt.

Lease Owner Ladd Petroleum Corporation
 Lease Name Engel "A" Well No. 3
 Office Address Box 520-Great Bend, Kansas 67530
 Character of Well (Completed as Oil, Gas or Dry Hole): Oil
 Date Well Completed 3-31-57
 Application for plugging filed 1-15-82
 Plugging commenced 3-7-83
 Plugging completed 3-7-83
 Reason for abandonment of well or producing formation Casing Failure-Arbuckle

Was permission obtained from the Conservation Division or it's
 Agent's before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt
 Producing formation Arbuckle Depth to top 3843 bottom 3850 T.D. 3850
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
Arbuckle	Oil & water	3843	3850	7 7/8	5 1/2	6'
		0	210	12 1/2	8 5/8	2'

Describe in detail the manner in which the well was plugged, indicating where the mud
 fluid was placed and the method or methods used in introducing it into the hold. If cement
 or other plugs were used, state the character of same and depth placed, from _____ feet
 to _____ feet for each plug set. Cement with 275 sx 50-50 pozmix, 6% gel, 3% CC,
pump 85 sx with 1 sk cotton seed hulls down annulus, 500# max press, pump 190 sx with
1 sack cotton seed hulls down 5 1/2" casing-pump wiper-plug to 40'

Note on completion:

5 1/2" csg was cemented with 100 sx cement-5 1/2" perforated @ 1520' & cemented with
600 sacks pozmix-top cement by Temp. Survey 485'

RECEIVED
 STATE CORPORATION COMMISSION
 3-15-83
 MAR 15 1983

(If additional description is necessary, use BACK of this sheet)
 Name of Plugging Contractor Self Cement by Halliburton

CONSERVATION DIVISION
 Wichita, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
Warren Irwin (employee of owner) or (owner or operator) of the
 above-described well, being first duly sworn on oath, says: That I have knowledge of the
 facts, statements, and matters herein contained and the log of the above-described well as
 filed and that the same are true and correct. So help me God.



(Signature) Warren Irwin
Box 520 Great Bend, Ks. 67530
 (Address)

SUBSCRIBED AND SWORN TO before me this 14th day of March, 1983

Howard D. Ewert
 Notary Public.

My Commission expires: December-15-1984

