


STATE OF KANSAS
 STATE CORPORATION COMMISSION
 Give All Information Completely
 Make Required Affidavit
 Mail or Deliver Report to:
 Conservation Division
 State Corporation Commission
 211 No. Broadway
 Wichita, Kansas

WELL PLUGGING RECORD

Russell County, Sec. 1 Twp. 14S Rge. 12W (E) (W)
 Location as "NE/CNW/SW" or footage from lines NW SE SW
 Lease Owner Frontier Oil Company
 Lease Name Galliant Well No. 1
 Office Address 1720 Wichita Plaza, Wichita, Kansas 67202
 Character of Well (completed as Oil, Gas or Dry Hole) D & A
 Date well completed May 23, 19 64
 Application for plugging filed May 23, 19 64
 Application for plugging approved May 23, 19 64
 Plugging commenced May 23, 19 64
 Plugging completed May 23, 19 64
 Reason for abandonment of well or producing formation D & A

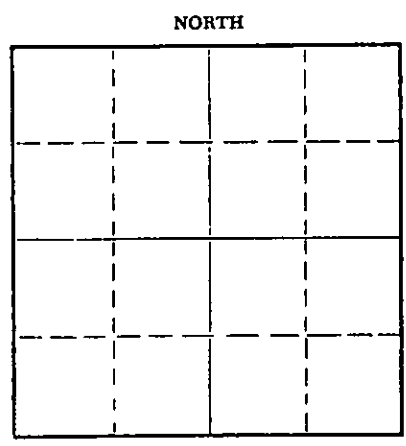

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3339 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	227'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug @ 350' w/20 sx cement, mud to 220', 1/4 sx hulls. Plug, 20 sx cement, mud to 40', 1/2 sx hulls. Plug cement to base of cellar, 2 sx in rathole.

RECEIVED
 STATE CORPORATION COMMISSION

MAY 27 1964
 05-27-1964
 CONSERVATION DIVISION
 Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company
 Address Box 173 -- Russell, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Maxine V. Head (employee of owner) ~~owner~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Maxine V. Head
1720 Wichita Plaza, Wichita, Kansas
 (Address)

SUBSCRIBED AND SWORN TO before me this 26th day of May, 19 64

My commission expires 5-22-66
Jean Holler Notary Public.

15-1167-00635-00-00

DRILLERS LOG

No. 1 Galliard

CASING RECORD:	COMPANY:	Frontier Oil Company	DESCRIPTION:
8 5/8" @ 227'	CONTRACTOR:	Red Tiger Drilling Co.	NW SE SW
w/170 sx cement	COMMENCED:	May 16, 1964	1-14S-12W
	COMPLETED:	May 23, 1964	Russell Co., Ks.
			ELEVATION:
			1801 DF
TOTAL DEPTH: 3339'			1804 RB

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface Soil, Post Rock & Shale	0	228	
Shale, Red Bed & Sand Streaks	228	580	
Red Bed	580	677	
Anhydrite	677	710	
Shale & Shells	710	1372	
Shale & Lime	1372	1950	
Shale & Shells	1950	1990	
Shale, Lime & Shells	1990	2300	
Shale & Lime	2300	2624	
Topeka	2624	2680	
Lime & Shale	2680	2860	
Lime	2860	2865	
Heebner	2865	2869	
Shale	2869	2949	
Brown Lime	2949	2962	
Lime	2962	3316	
Arbuckle	3316	3339	

RECEIVED
STATE CORPORATION COMMISSION

MAY 27 1964
05-27-1964
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

FRONTIER OIL COMPANY

Maxine V. Head
Maxine V. Head

Subscribed and sworn to before me this 26th day of May, 1964.

Jean Hollan
Notary Public

My Commission Expires:

5-22-66