

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Russell County, Sec. 21 Twp. 14 Rge. 11 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SW NE SW

Lease Owner Frank W. Vishnefske

Lease Name Bunker Well No. 1

Office Address 119 South Santa Fe, Salina, Kansas 67401

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed 5-29-73

Application for plugging filed 5-29-73

Application for plugging approved 5-29-73


Plugging commenced 5-29-73

Plugging completed 5-29-73

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

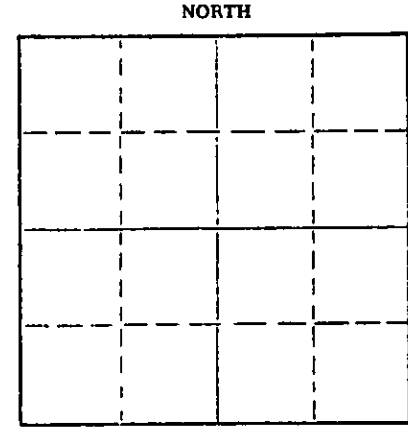

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Don Truan

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,175 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	283'	Cmtd. w/160 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole w/heavy mud
 Push bridge plug to 450'
 Spot 40 sax cement on plug thru 4 1/2" drill pipe
 Fill hole w/heavy mud
 Push bridge plug to 280'
 Spot 25 sax cement on plug thru 4 1/2" drill pipe
 Fill hole w/heavy mud
 Push bridge plug to 40' w/1/2 sax hulls on plug
 Dump 10 sax cement on plug to cellar

RECEIVED
 STATE CORPORATION COMMISSION
 JUN 26 1973
 CONSERVATION DIVISION
 Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Co., Inc.

Address Shields Bldg., Russell, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss. R. L. Shields contractor

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. L. Shields v. p. r.
Shields Bldg., Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 18th day of June, 19 73

My commission expires May 26, 1975

Ruth Phillips
Notary Public.



Shields


15-167-20601-00-00

Russell, Kansas

WELL LOG

Operator: Frank W. Vishnefske
 Well: Bunker #1
 Commenced: May 21, 1973
 Completed: May 29, 1973
 Contractor: Shields Drilling Co., Inc.

Well Description: SW NE SW
 Sec. 21-14S-11W
 Russell Co., Kansas



CASING RECORD		
Size	Run	Pulled
8 5/8"	283'	Cmtd. w/160 sax

Elevation: 1,684' RB
 Treatment:
 Production: D & A
 Tops:

..... Figures Indicate Bottom of Formations

Sand & shale	345'
Sand, shale & redbed	542'
Anhydrite	570'
Redbed & shale	850'
Shale	1,290'
Shale & lime	1,545'
Lime	1,680'
Lime & shale	2,458'
Lime	3,175' RTD

RECEIVED
 STATE CORPORATION COMMISSION

JUN 26 1973

CONSERVATION DIVISION
 Wichita, Kansas

Notes