


P

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

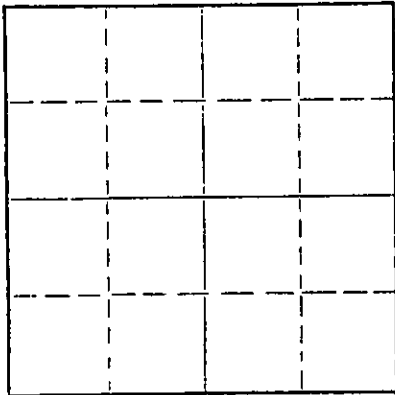

Locate well correctly on above Section Plat

Russell County. Sec. 27 Twp. 14 Rge. 12 (E) W (W)
Location as "NE/CNW&SW&" or footage from lines NE SW NW
Lease Owner Bennett & Roberts Oil Operations
Lease Name Morris Well No. 2
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed March 3 19 67
Application for plugging filed March 3 19 67
Application for plugging approved March 3 19 67
Plugging commenced March 3 19 67
Plugging completed March 3 19 67
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,190 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	313'	Cmtd w/ 180 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill w/ heavy mud to 310'
Set bridge plug @ 310' w/ 1/4 sax hulls on plug
Dump 25 sax cement on plug thru 4 1/2" drill pipe
Fill w/ heavy mud to 40'
Set bridge plug @ 40' w/ 1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar

RECEIVED
STATE CORPORATION COMMISSION
MAR 22 1967
03-22-1967
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Shields Drilling Co., Inc.
Address Russell, Kansas

STATE OF KANSAS COUNTY OF RUSSELL
R. J. Shields Contractor

(employee of owner or owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. J. Shields
Shields Bldg., Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of March, 1967

My commission expires May 26, 1967
Luth Phillips
Notary Public.




Shields

WELL LOG

Russell, Kansas
15-167-20018-00-00

Operator: Bennett & Roberts Oil Operations
 Well: Morris #2
 Commenced: February 24, 1967
 Completed: March 3, 1967
 Contractor: Shields Drilling Co., Inc.

Well Description: NE SW NW
 Sec. 27-14S-12W
 Russell Co., Kansas



CASING RECORD

Size	Run	Pulled
8 5/8"	313'	Cmtd w/ 180 sax

Elevation:
 Treatment:

Production: D & A

Tops:

..... Figures Indicate Bottom of Formations

Sand, shale, hard sand	290'
Shale	320'
Shale & shells	350'
Shale	579'
Anhydrite	610'
Shale & shells	950'
Salt, shale & shells	1,260'
Shale & lime	1,520'
Lime	1,650'
Lime & shale	2,500'
Lime	3,190' R T D

RECEIVED
 STATE CORPORATION COMMISSION
 MAR 22 1967
 03-22-1967
 CONSERVATION DIVISION
 Wichita, Kansas

DST #1 2,852'-70' Tool open 30 min. Recovered 12' muddy water.
 IBHP-857#, IFP-28#, FFP-38#, FBHP-820#