


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
500 Bittling Building  
Wichita, Kansas

15-167-04514-00-00  
WELL PLUGGING RECORD

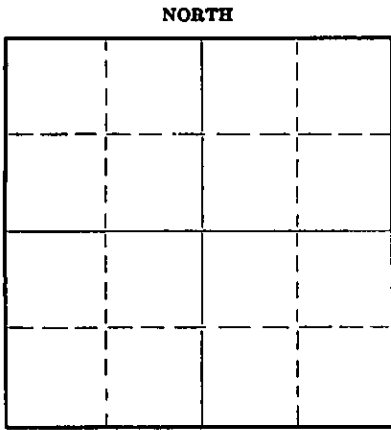

Locate well correctly on above  
Section Plat

RUSSELL County. Sec. 16 Twp. 14 Rge. 12 (E) (W)  
Location as "NE/CNW4SW4" or footage from lines SE NE  
Lease Owner ERNEST BERRY INVESTMENT CO.  
Lease Name BODE Well No. 1  
Office Address 1801 MAIN ST., NEWTON, KANSAS  
Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE  
Date well completed OCTOBER 27, 1949 19  
Application for plugging filed October 26, 1949 Verbally 19  
Application for plugging approved October 26, 1949 Verbally 19  
Plugging commenced October 26, 1949 19  
Plugging completed October 26, 1949 19  
Reason for abandonment of well or producing formation DRY HOLE

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well C. D. STOUGH  
Producing formation Depth to top Bottom Total Depth of Well 3280 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	219	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fill Hole with Heavy Mud to 219 ft.  
Wooden Plug and 15 Sacks Cement.  
Fill Hole to 30' with Heavy Mud.  
Wooden Plug and 10 sacks cement.  
Tie top Plug to Surface Pipe.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to ERNEST BERRY INVESTMENT CO.  
Address 1801 MAIN ST., NEWTON, KANSAS

STATE OF KANSAS, COUNTY OF RUSSELL, ss.  
DON ROBERTS (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Don Roberts*

RUSSELL, KANSAS (Address)

SUBSCRIBED AND SWORN to before me this 1 st day of NOVEMBER, 1949

*Clara Hummel* Notary Public.

My commission expires 6/17/50

22-5133-a 9-48-10M

**PLUGGING**  
FILE SEC 167 14 R 120  
BOOK PAGE 177 LINE 17

15-1161 04514 00-00

BERRY INVESTMENT CO.  
BODE # 1

Sec. 16 Twp. 14 Rge. 12  
RUSSELL, COUNTY, KANSAS

Total Depth: 3280'  
Comm: 10/3/49  
Comp: 10/27/49

Casing

Cement

8 5/8" Set @ 219'

150 Sacks

Formation	Depth:
Surface Clay & Shale	110
Shale & Shells	219
Shale & Red Bed	640
Anhydrite & Lime	685
Red Bed & Shale	915
Shale & Salt	1320
Lime & Shale	2615
Lime	3253
Congl	3280

STATE OF KANSAS )  
RUSSELL COUNTY ) SS


I hereby certify that the above information is true and correct to the best of my knowledge.

*Violet Keller*

Subscribed and sworn to before me this 1st day of November, 1949

*Clara Lumme*

My commission expires: 6/17/50

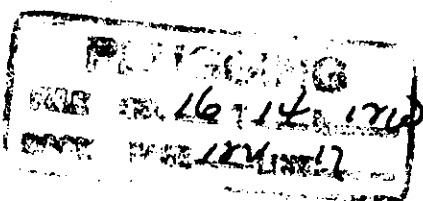

11-04-1949