


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

Russell County. Sec. 13 Twp. 14 Rge. 12 (E) W (W)  
Location as "NE/CNWSW" or footage from lines SE SW SW  
Lease Owner Frank W. Vishnefske  
Lease Name Herbel Well No. 2  
Office Address 119 South Santa Fe, Salina, Kansas 67401  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed 8-26-1973  
Application for plugging filed 8-26-1973  
Application for plugging approved 8-26-1973  
Plugging commenced 8-26-1973  
Plugging completed 8-26-1973  
Reason for abandonment of well or producing formation Dry hole

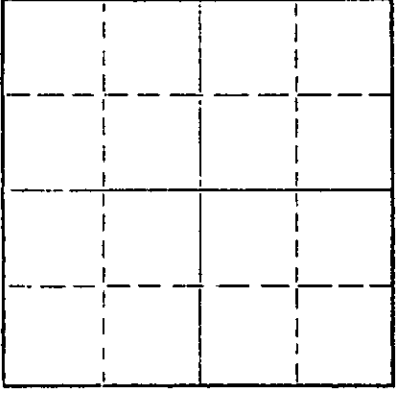

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truan  
Producing formation Depth to top Bottom Total Depth of Well 3,259 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	260'	Cmtd. w/160 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fill hole w/heavy mud  
Push bridge plug to 450'  
Spot 40 sax cement on plug thru 4 1/2" drill pipe  
Fill hole w/heavy mud  
Push bridge plug to 240'  
Spot 25 sax cement on plug thru 4 1/2" drill pipe  
Fill hole w/heavy mud  
Push bridge plug to 40' w/1/2 sax hulls on plug  
Dump 10 sax cement on plug to cellar

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 31 1973  
08 31 1973  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Shields Drilling Co., Inc.  
Address Shields Bldg., Russell, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss. R. L. Shields contractor of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. L. Shields, v. pres.  
Shields Bldg., Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 29th day of August, 1973

Luck Phillips  
Notary Public.

My commission expires May 26, 1975



# Shields


15-107-20615-00-00

Russell, Kansas

## WELL LOG

Operator: Frank W. Vishnefske  
 Well: Herbel #2  
 Commenced: August 19, 1973  
 Completed: August 26, 1973  
 Contractor: Shields Drilling Co., Inc.

Well Description: SE SW SW  
 Sec. 13-14S-12W  
 Russell Co., Kansas



### CASING RECORD

Size	Run	Pulled
8 5/8"	260'	Cmtd. w/160 sax

Elevation:  
 Treatment: 1,717' RB

Production: D & A

Tops:

..... Figures Indicate Bottom of Formations .....

Sand & shale	230'
Shale	320'
Shale, sand & redbed	576'
Anhydrite	607'
Redbed, shale & shells	900'
Shale & salt	1,280'
Shale & lime	2,540'
Lime	2,693'
Lime & shale	2,786'
Lime	3,259' RTD

RECEIVED  
 STATE CORPORATION COMMISSION

AUG 31 1973  
 08-31-1973  
 CONSERVATION DIVISION  
 Wichita, Kansas