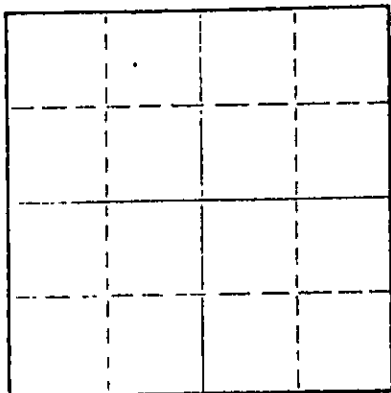


15-167-21259-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation CommissionP. O. Box 17027
Wichita, Kansas 67217
NORTHLocate well correctly on above
Section Plat

Russell County, Sec. 13 Twp. 14S Rge. 12W (E) (W)
 Location as "NE/CNW/SE/SW" or footage from lines C SE NW
 Lease Owner Davies & Company, Inc.
 Lease Name Major Well No. 1-13
 Office Address 1304 Philtower Bldg., Tulsa, Oklahoma
 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
 Date well completed December 12 1978
 Application for plugging filed December 12 1978
 Application for plugging approved December 12 1978
 Plugging commenced December 12 1978
 Plugging completed December 12 1978
 Reason for abandonment of well or producing formation Dry Hole
 If a producing well is abandoned, date of last production 19
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Massey
 Producing formation Depth to top Bottom Total Depth of Well 2345 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	343'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug @ 420' w/50 sx cement,
 plug @ 300' w/25 sx cement,
 Bridge @ 40' w/10 sx cement,
 2 sx cement in rathole.

RECEIVED
 STATE CORPORATION COMMISSION
 DEC 20 1978
 CONSERVATION DIVISION
 Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
 Name of Plugging Contractor B & B Drilling, Inc.
 Address 515 Union Center, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Bill Lahar (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)


515 Union Center, Wichita, Ks.

(Address)

1978

Betty M. Abbott

Notary Public.



My commission expires 22, 1979

15-167-21259-00-00

DRILLERS LOG

December 14, 1978

#1-13 Major
C SE NW
Sec. 13-14S-12W
Russell Co., Kansas

OPERATOR: Davies & Company, Inc.

CONTRACTOR: B & B Drilling, Inc.

COMMENCED: December 6, 1978

COMPLETED: December 12, 1978

8 5/8" @ 343' w/180 sx

0	593	Shale
593	628	Anhydrite
628	1525	Shale
1525	1555	Lime & Shale
1555	1860	Shale
1860	2264	Lime & Shale
2264	2345	Lime
2345		RTD

D & A

We certify that the above and foregoing is a true and correct copy of the log on the #1-13 Major located in Russell County, Kansas.


B & B DRILLING, INC.

Bill Lahar

Bill Lahar

President

Subscribed and sworn to before me this 14th day of December, 1978.



Betty M. Abbott
Betty M. Abbott Notary Public

RECEIVED
STATE CORPORATION COMMISSION
DEC 20 1978
12-20-1978
CONSERVATION DIVISION
Wichita, Kansas