


15-167-22245-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Russell County. Sec. 11 Twp. 14 Rge. 12W E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines  
SW SW SW  
Lease Owner Shields Oil Producers, Inc.  
Lease Name Mahoney Well No. 1  
Office Address Shields Bldg., Russell, Kansas 67665  
Character of Well (Completed as Oil, Gas or Dry Hole)  
Dry hole  
Date Well completed 11-9 1983  
Application for plugging filed 11-9 1983  
Application for plugging approved 11-9 1983  
Plugging commenced 11-9 1983  
Plugging completed 11-9 1983  
Reason for abandonment of well or producing formation  
Dry hole

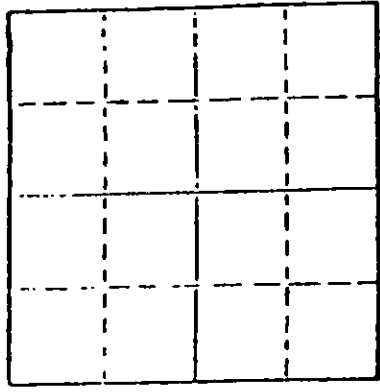

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Scheck  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3,325'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	691'	Cmtd. w/350 sax.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

- Spotted 25 sax cement @3,315' thru 4 $\frac{1}{2}$ " drill pipe
- Fill hole w/heavy mud
- Push bridge plug to 700'; spotted 25 sax cement on plug thru 4 $\frac{1}{2}$ " drill pipe
- Push bridge plug to 480'; spotted 100 sax cement on plug thru 4 $\frac{1}{2}$ " drill pipe
- Push bridge plug to 40' w/ $\frac{1}{2}$  sax hulls on plug
- Dump 10 sax cement on plug to cellar
- Dump 10 sax cement in rat hole
- Dump 10 sax cement in mouse hole

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Co., Inc.


STATE OF KANSAS COUNTY OF RUSSELL, ss.  
R.L. Shields (~~employee of owner~~) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Richard L. Shields  
Shields Bldg., Russell, Kansas 67665  
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of November, 1983

Ruth Phillips  
Notary Public.

My commission expires



NOV 18 1983  
11-18-1983  
CONS. DIV. OF CORP. COM.  
WICHITA, KANSAS