


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

15-167-05914-00-00
WELL PLUGGING RECORD

NORTH

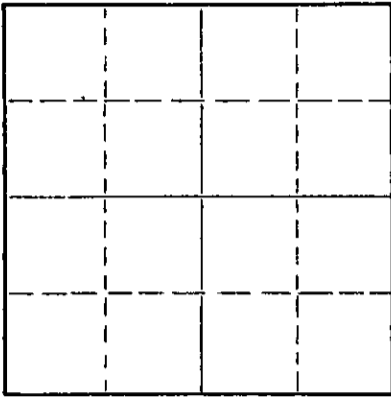

Locate well correctly on above
Section Plat

Russell County. Sec 10 Twp 14S Rge 13 (E) W(W)
Location as "NE/CNWSW" or footage from lines SE SW SW
Lease Owner Kessler and Schmidt
Lease Name Lewis Well No. #2
Office Address Russell, Kansas.
Character of Well (completed as Oil, Gas or Dry Hole) Oil well.
Date well completed 7-5 19 54
Application for plugging filed 6-27 19 55
Application for plugging approved 6-30-55 19
Plugging commenced 7-5 19 55
Plugging completed 7-12 19 55
Reason for abandonment of well or producing formation Not enough production.

If a producing well is abandoned, date of last production We do not know. 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes.

Name of Conservation Agent who supervised plugging of this well Milton Galyardt.
Producing formation Tarkio Depth to top 2357 Bottom 2364 Total Depth of Well 2440 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	235	XX
				5 1/2	2400	1525'.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

2100'-----2345'.....Sand.
2345'-----2305'.....5-sacks cement.
2305'-----300'.....Heavy Mud.
300'-----30'.....100 sacks cement.
Cemented with Halliburton.
30'-----Top.....Cement for cap.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Betts Oil Field Service
Address 37 South Kansas, Russell, Kansas.

STATE OF _____, COUNTY OF _____, ss.
Harold Betts (~~Harold Betts~~) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Harold Betts
37 South Kansas, Russell, Kansas. (Address)

SUBSCRIBED AND SWORN TO before me this 20th day of August, 1955

My commission expires 7 May 7, 1958

PLUGGING
FILE SEC 10 T 14 R 13W
BOOK PAGE 130 LINE 6

RECEIVED Notary Public.
STATE CORPORATION COMMISSION

AUG 22 1955
CONSERVATION DIVISION
Wichita, Kansas