


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Russell County, Sec. 34 Twp. 14S Rge. 11W /E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
C SE/4 NE/4 SW/4
Lease Owner F & M Oil Company, Inc.
Lease Name Dolecek Well No. 1
Office Address 505 Union Center, Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole) _____
D & A
Date Well completed December 21, 1979
Application for plugging filed December 21, 1979
Application for plugging approved December 21, 1979
Plugging commenced December 22, 1979
Plugging completed December 22, 1979
Reason for abandonment of well or producing formation _____
D & A
If a producing well is abandoned, date of last production 19__

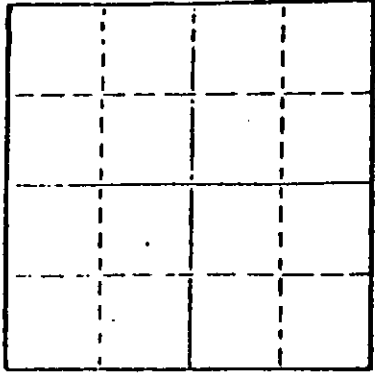

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Duane L. Rankin
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,230'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	264.12'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

- 1st Plug @ 450' w/50 sx cement
- 2nd Plug @ 270' w/25 sx cement
- Top Plug @ 40' w/1/2 sx hulls & 10 sx cement
- 5 sx cement in rathole
- 50-50 Pozmix, 4% Gel

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company
1720 KSB&T Building, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss. contractor
Gloria Fawcett (employee of ~~xxxxxxx~~)



of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Gloria Fawcett
1720 KSB&T Building, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of December, 1979.

My commission expires _____

Joyce A. Hagermann Notary Public.



15-167-21392-00-00

DRILLERS LOG

No. 1 Dolecek

CASING RECORD:	COMPANY:	F & M Oil Company, Inc.	DESCRIPTION:
8 5/8" @ 271.42'	CONTRACTOR:	Red Tiger Drilling Company	C SE/4 NE/4 SW/4
w/165 sx cement	COMMENCED:	December 14, 1979	Sec. 34-T14S-R11W
D & A	COMPLETED:	December 22, 1979	Russell County, Kansas
TOTAL DEPTH: 3,230'			ELEVATION: 1,676' KB

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Soil, Sand, Shale, Hard Sand	0	275	
Shale	275	465	
Red Bed	465	530	
Anhydrite	530	560	
Shale	560	1220	
Lime & Shale	1220	2438	
Lime	2438	3230	
RTD		3230	


I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Gloria Fawcett
Gloria Fawcett

Subscribed and sworn to before me this 27th day of December, 1979.

Joyce A. Hagermann
Notary Public



RECEIVED
JAN 2 1980
CONSULTATION DIVISION
TULSA, OKLAHOMA