

15-167-2072700-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

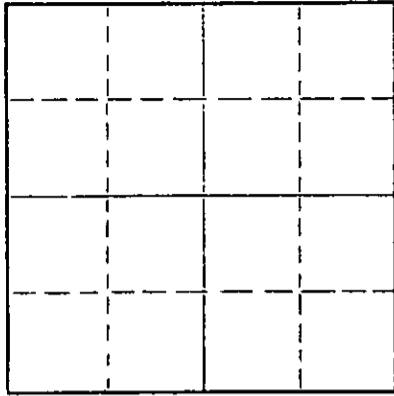

Locate well correctly on above
Section Plat

Russell County, Sec. 27 Twp. 14 Rge. 11 (E) W (W)
Location as "NE/CNWxSWx" or footage from lines NW SE NW
Lease Owner Frank W. Vishnefske
Lease Name Beisel Well No. 1
Office Address 119 South Santa Fe, Salina, Kansas 67401
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 4-11 19 75
Application for plugging filed 4-11 19 75
Application for plugging approved 4-11 19 75
Plugging commenced 4-11 19 75
Plugging completed 4-11 19 75
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well 2,900 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	190'	Cmtd. w/160 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fill hole w/heavy mud
Push bridge plug to 280'
Spot 40 sax cement on plug thru 4 1/2" drill pipe
Fill hole w/heavy mud
Push bridge plug to 180'
Spot 25 sax cement on plug thru 4 1/2" drill pipe
Fill hole w/heavy mud
Push bridge plug to 40' w/1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar
Dump 2 sax cement in rat hole

RECEIVED
STATE CORPORATION COMMISSION
04-24-75
CONSERVATION DIV.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Co., Inc.
Address Shields Bldg., Russell, Kansas

STATE OF KANSAS COUNTY OF RUSSELL
R. L. Shields (employee of owner) or (owner or operator) contractor
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. L. Shields
Shields Bldg., Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of April, 1975

My commission expires May 26, 1975
Notary Public.



Shields


15-167-20727-00-00

Russell, Kansas

WELL LOG

Operator: Frank W. Vishnefske
 Well: Beisel #1
 Commenced: April 5, 1975
 Completed: April 11, 1975
 Contractor: Shields Drilling Co., Inc.

Well Description: NW SE NW
 Sec. 27-14S-11W
 Russell Co., Kansas



Elevation: 1,663' RB
 Treatment:
 Production: D & A
 Tops:

CASING RECORD

Size	Run	Pulled
8 5/8"	190'	Cmtd. w/160 sax

..... Figures Indicate Bottom of Formations

Top soil & sand	20'
Clay & shale	200'
Shale	1,195'
Shale & lime	2,427'
Lime	2,556'
Lime & shale	2,644'
Lime	2,778'
Shale	2,837'
Lime & shale	2,865'
Lime	2,900' RTD

RECEIVED
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION
 Wichita, Kansas

Notes