

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

WELL PLUGGING RECORD

Ellis County Sec. 20 Twp. 14s Rge. 18 E/W
Location as "NE/CNW/SW" or footage from lines

C SW SW SE

Lease Owner Lexicon Resources Corporation

Lease Name Leonhardt Well No# 34-20

Office Address 633 17th St. First Denver Plaza Suite 2110
Denver, Colo. 80202

Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

Date Well completed April 1 1981

Application for plugging filed April 1 1981

Application for plugging approved April 1 1981

Plugging commenced 12:15 P.M. April 1 1981

Plugging completed 1:30 P.M. April 1 1981

Reason for abandonment of well or producing formation No commercial production


If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Marian Schmidt

Producing formation Depth to top Bottom Tl. Depth of Well

Show depth and thickness of all water, oil and gas formations.

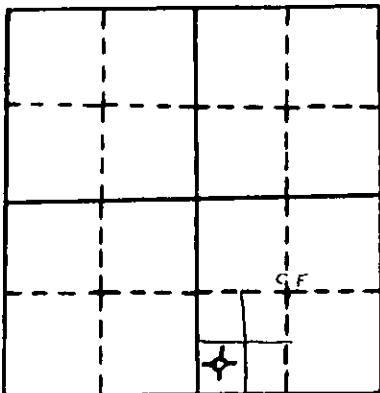

locate well correctly on above Section Plot

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
surface	common	0'	613'	8 5/8	613'	0'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

plug #1 set @ 660' with 65 sxs

plug #2 set @ 240' with 30 sxs

plug #3 set @ 40' with 1 sx Hulls 1 wooden plug and 10 sxs

plugged rathole with 5 sxs

Total plug 110sxs 50-50 Poz 6% gel

PD @ 1:30 P.M.

*RCW
09-23-82*

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pioneer Drilling Company, Inc
308 West Mill Plainville, KS 67663

STATE OF Colorado COUNTY OF Denver, ss.

Phyllis K. Scott (employee of owner) or (owner or operator) of the above described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well is filed and that the same are true and correct. So help me God.

(Signature) Phyllis K. Scott
(Address) 633 17th St., Denver, CO

SUBSCRIBED AND SWORN TO before me this 23 day of Sept., 1982

My commission expires April 14, 1986
Jamie Lynn Killion
Notary Public

WELL LOG

OPERATOR: Lexicon Resources Corporation

WELL NAME: Leonhardt #34-20 LOCATION: C' SW SW SE 20-14s-18W

COUNTY: Ellis STATE: Kansas

WELL COMMENCED: March 21, 1981 WELL COMPLETED: April 1, 1981 ●

ELEVATION: 2091' K.B. TOTAL DEPTH: 3819'

PRODUCTION: D & A RIG NO: #1

CASING - 8 5/8": Tally @ 605.77' of new 23# set 1' of bottom @ 613' cement with 325 sxs comm
3 1/2 cc cement circ. PD @ 1:15 P.M. 15 joints March 22 1981
 5 1/2": none

ALL MEASUREMENTS TAKEN FROM THE TOP OF ROTARY BUSHING:

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS:
0'	380'	sand & shale & pyrite		
380'	614'	shale & sand	614 - 1 degree	
614'	1010'	shale		
1010'	1309'	shales & sands		
1309'	1353'	Anhydrite		
1353'	1620'	shales		
1620'	2030'	shale & lime	2030 - 3/4 degree	
2030'	2314'	shale & lime		
2314'	2492'	limes & shales		
2492'	2783'	lime & shale		
2783'	2999'	lime & shale		
2999'	3144'	lime & shale		
3144'	3296'	lime & shale		
3296'	3320'	limes & shales		
3320'	3385'	lime & shale		
3385'	3412'	lime & shale		
3412'	3416'	lime & shale		
3416'	3450'	lime & shale		
3450'	3513'	lime & shale		
3513'	3581'	lime & shale Kansas City		
3581'	3594'	lime & shale		
3594'	3617'	lime & shale		
3617'	3710'	lime & shale		
3710'	3795'	shale & lime		
3795'	3819'	lime & shale		
3819'	3819'			
3819'		RTD		

RECEIVED
STATE CORPORATION COMMISSION

MAY 12 1981

CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS
COUNTY OF


The undersigned hereby certifies that to the best of his knowledge and belief, the above facts are true and correct

PIONEER DRILLING CO., INC.

By Conrad R. Anderson

SUBSCRIBED AND SWORN TO, BEFORE ME, This 5th day of April, 1981

Judy Smith
NOTARY PUBLIC



●Completion date corrected

WELL LOG

OPERATOR: Lexicon Resources Corporation

WELL NAME: Leonhardt #34-20 LOCATION: C SW SW SE 20-14s-18W

COUNTY: Ellis STATE: Kansas

WELL COMMENCED: March 21, 1981 WELL COMPLETED: April 4, 1981

ELEVATION: 2091' K.B. TOTAL DEPTH: 3819'

PRODUCTION: D & A RIG NO: #1

CASING - 8 5/8": Tally @ 605.77' of new 23# set 1' of bottom @ 613' cement with 325 sxs common 3/8 cc cement circ. PD @ 1:15 P.M. 15 joints March 22, 1981
 5 1/2": none

ALL MEASUREMENTS TAKEN FROM THE TOP OF ROTARY BUSHING:

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS:
0'	380'	sand & shale & pyrite		
380'	614'	shale & sand	614 - 1 degree	
614'	1010'	shale		
1010'	1309'	shales & sands		
1309'	1353'	Anhydrite		
1353'	1620'	shales		
1620'	2030'	shale & lime	2030 - 3/4 degree	
2030'	2314'	shale & lime		
2314'	2492'	limes & shales		
2492'	2783'	lime & shale		
2783'	2999'	lime & shale		
2999'	3144'	lime & shale		
3144'	3296'	lime & shale		
3296'	3320'	limes & shales		
3320'	3385'	lime & shale		
3385'	3412'	lime & shale		
3412'	3416'	lime & shale		
3416'	3450'	lime & shale		
3450'	3513'	lime & shale		
3513'	3581'	lime & shale Kansas City		
3581'	3594'	lime & shale		
3594'	3617'	lime & shale		
3617'	3710'	lime & shale		
3710'	3795'	shale & lime		
3795'	3819'	lime & shale		
3819'	3819'			
3819'		RTD		

STATE OF KANSAS
 COUNTY OF

The undersigned hereby certifies that to the best of his knowledge and belief, the above facts are true and correct

PIONEER DRILLING CO., INC.
 By Carroll J. Austin

SUBSCRIBED AND SWORN TO, BEFORE ME, This 5th day of April, 1981

Judy Smith
 NOTARY PUBLIC

