

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-113-01240-00-00
Spot: NENENW Sec/Twnshp/Rge: 26-19S-2W
4950 feet from S Section Line, 2970 feet from E Section Line
Lease Name: WILLIAMS Well #: 1
County: MCPHERSON Total Vertical Depth: 3379 feet

Operator License No.: 5399
Op Name: AMERICAN ENERGIES CORPORATION
Address: 155 N MARKET STE 710
WICHITA, KS 67202

| String | Size | Depth (ft) | Pulled (ft) | Comments |
|--------|------|------------|-------------|----------|
| SURF | 15.5 | 502 | | UNKNOWN |
| COND | 20 | 70 | | UNKNOWN |
| PROD | 5 | 2902 | | UNKNOWN |

Well Type: OIL UIC Docket No: Date/Time to Plug: 07/05/2011 8:00 AM

Plug Co. License No.: 31528 Plug Co. Name: MIKE KELSO OIL, INC.

Proposal Rcvd. from: Company: Phone:

Proposed Plugging Method: AS PER KCC RULES AND REGULATIONS

Plugging Proposal Received By: JEFF KLOCK

Witness Type: PARTIAL

Date/Time Plugging Completed: 07/05/2011 8:00 AM

KCC Agent: PATRICK SHIELDS

Actual Plugging Report:

Perfs:


*NO PIPE WAS PULLED FROM HOLE DUE TO LARGE, OLD CELLAR PREVENT A UNIT FROM GETTING OVER THE HOLE. A CAST IRON BRIDGE PLUG WAS SET AT 450'. POLY LINE WAS RAN DOWN TO 415' AND 119 SX OF CEMENT WAS CIRCUALTED TO SURFACE. OLD CELLAR WAS FILLED WITH 175 SX OF CEMENT. CEMENT FELL 14' IN WELL 12' IN CELLAR, BOTH TOPPED OFF. TICKET #37718

Remarks:

Plugged through: CSG

District: 02

Signed

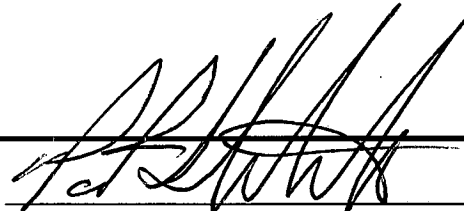

(TECHNICIAN)

RECEIVED

Form CP-2/3

JUL 25 2011

KCC WICHITA