

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Scott County. Sec. 13 Twp. 18S Rge. 32W (E) (W)

Location as "NE/CNW%SW%" or footage from lines SE NE NE

Lease Owner Thunderbird Drilling, Inc.

Lease Name Beckley Well No. 2

Office Address Box 18407, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 2-24 19 73

Application for plugging filed 2-24 19 73

Application for plugging approved 2-24 19 73


Plugging commenced 2-24 19 73

Plugging completed 2-24 19 73

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

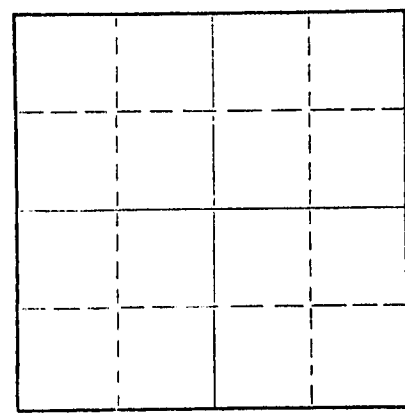

Name of Conservation Agent who supervised plugging of this well Bill Nichols

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4597 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	610'	-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mud to 1225' - 70 sacks cement
Mud to 620' - 20 sacks cement
Mud to 40' - plug, 1/4 sack hulls, 10 sacks cement

RECEIVED
STATE CORPORATION COMMISSION
FEB 27 1973
2-27-73
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor _____

Address _____

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Jack D. Dunne (employee of owner) or (~~owner or operator~~) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack D. Dunne

Suite 250, 200 West Douglas, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of February, 19 73

My commission expires December 14, 1973 M. J. [Signature] Notary Public.

DRILLERS LOG

#2 BECKLEY
SE NE NE Section 13-18S-32W
Scott County, Kansas

OPERATOR: Thunderbird Drilling, Inc.
P. O. Box 18442
Wichita, Kansas

CONTRACTOR: Dunne-Gardner Petroleum, Inc.
Suite 250, 200 West Douglas
Wichita, Kansas

COMMENCED: February 11, 1973

COMPLETED: February 24, 1973

CASING RECORD: 8-5/8" @ 610' w/450 sx

<u>FROM</u>	<u>TO</u>	<u>DESCRIPTION</u>
0	260	Clay and shale
260	610	Shale
610	1300	Shale and shells
1300	1742	Shale
1742	1778	Anhydrite
1778	1842	Shale
1842	2045	Sand
2045	2234	Shale and shells
2234	2394	Anhydrite
2394	2400	Shale
2400	2899	Shale and lime
2899	2965	Lime
2965	2978	Chalk and shale
2978	2990	Lime
2990	3208	Lime and shale
3208	3420	Lime
3420	3445	Lime and shale
3445	4597	Lime
4597		Rotary total depth

RECEIVED
STATE CORPORATION COMMISSION
FEB 27 1973
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) ss
COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct log, to the best of my knowledge and belief.

Jack D. Dunne

Jack D. Dunne

Subscribed and sworn to before me this 26th day of February, 1973.

My commission expires:
December 14, 1973

March Day

Notary Public