


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH



Locate well correctly on above
Section Plat

Saline County, Sec. 36 Twp. 15 Rge. 4 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SE SW SW
Lease Owner Fender Pipe & Supply, Inc.
Lease Name Burk Well No. 3
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 8-13-66 19
Plugging completed 8-17-66 19
Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well 3442 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	330'	None
				4-1/2"	3440'	2918'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 3442', sanded hole to 3430' and dumped 3 sacks of cement @ 3430' with dump bailer. Pulled 4 1/2" casing, bailed hole to 260', set rock bridge to 250' and dumped 20 sacks of cement. Mudded hole to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETE.

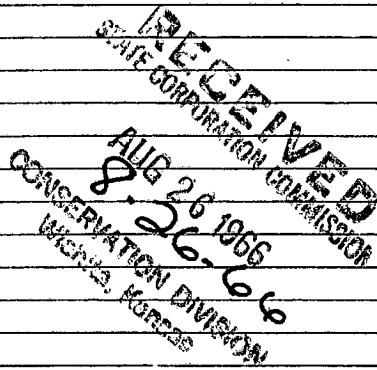

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 23rd day of August, 1966



Milton J. Volin
Notary Public.

ROTARY DRILLER'S LOG

15-169-00505-0000

Derby Oil Co., Operator
Box 1030
Wichita, Kansas

Elevation
1330 K. B.

Burk #3

Top 8-5/8" x 4 1/8" Head 6.29'
below K. B.

SE 1/4 SW 1/4 SW 1/4
Sec. 36-15S-4W
Saline County, Kansas

Casing Record:
8-5/8" 330' cemented w/
340 sacks
4 1/8" 3440' cemented w/75 sx

Well Commenced: 7-2-51
Well Completed: 7-20-51

Contractor: E. K. Carey, Contractor, (Rig No. 1) Box 620, McPherson, Kansas
Geologist: E. McNeil with Derby Oil Company, Box 1030, Wichita, Kansas

Figures Indicate Bottom of Formations KB

Base & cellar	3	Lime & shale	2285
Shale & shells	63	Lime	2335
Sand	75	Lime	2465
Shale & shells	260	Lime	2540
Sand & shale	280	Lime	2650
Shale & lime	330	Lime	2745
Shale & shells	370	Lime	2795
Shale & shells	420	Shale & lime	2845
Lime	525	Shale & lime	2912
Lime & shale	660	Lime	2946
Lime & shale	780	Lime	2988
Lime & shale	905	Lime	3030
Lime & shale	960	Lime	3090
Shale & lime shells 33	1035	Lime	3150
Shale lime	1185	Lime	3180
Shale & lime	1370	Lime	3200
Shale & lime	1540	Shale & lime	3240
Shale lime	1665	Shale & lime	3330
Shale & lime	1850	Shale & lime	3404
Shale & lime	1970	Shale & lime	3438
Lime & shale	2065	Lime	3442 TD
Lime & shale	2215		

Top Maquoketa 3439 KB (-2109)
Total Rotary Depth 3442 KB (-2112)

The above Rotary Driller's Log is complete and correct to the best of my knowledge.

E. K. Carey, Contractor

Herbert Rhoton
By Herbert Rhoton, Supt.