

15-053-0019d-00-00

WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD


Strike out upper line when reporting plugging off formations.

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Ellsworth County. Sec. 35 Twp. 14 Rge. (E) 10 (W)
 Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines 990'N 330'W of E/4 Corner
 Lease Owner Cities Service Oil Co.
 Lease Name Vanek Well No. 1
 Office Address Bartlesville, Oklahoma
 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
 Date well completed 12-31 1948
 Application for plugging filed 12-31 1948
 Application for plugging approved 12-31 1948
 Plugging commenced 12-31 1948
 Plugging completed 12-31 1948
 Reason for abandonment of well or producing formation Dry Hole

NORTH

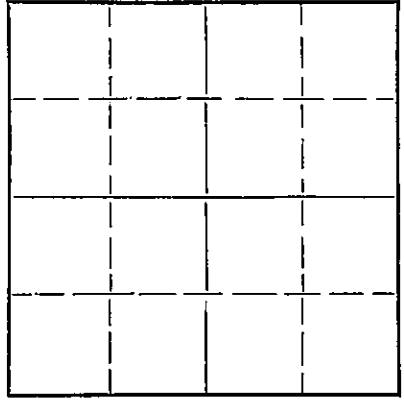

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production - 19
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes
 Name of Conservation Agent who supervised plugging of this well Ruel Durkee LCPerson, Kansas
 Producing formation Arbuckle Depth to top 3121 Bottom Total Depth of Well 3155 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Arbuckle Lime				8 5/8	294	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with heavy mud from total depth to 290'. Set wood plug dumped 15 sacks cement, heavy mud to 15'. Set wood plug dumped 5 sacks cement mud and dirt to surface.

02-01-49

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Mr. R. C. Cooper
 Address Box 751 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
 Mr. James Porter (employee of owner) or ~~conservation agent~~ of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *James Porter*

P. O. Box 553 Russell, Kansas
 (Address)

SUBSCRIBED AND SWORN to before me this 31st day of January 1949
W. D. Smith
 Notary Public.

My commission expires 3-12-1951

PLUGGING
 SEC 35, T 14, R 10
 PAGE 77 LINE 19

15-053-00197-00-00

WELL RECORD

Company Cities Service Oil Co. Well No. 1 Farm Vanek
 Location 990'N and 330'W of E/4 Corner Sec. 35 T. 14 R. 10W
 Elevation 1650 (1648 gr.) County Ellsworth State Kansas
 Drlg. Comm. 12-16-48 Contractor B. & R. Drilling Co.
 Drlg. Comp. 12-30-48 Acid None
 T. D. 3155' Initial Prod. None. Dry Hole. Plugged and Abandoned, 12-31-48.

CASING RECORD:

8-5/8" @ 295' with 175 sacks cem.

FORMATION RECORD:

Sand	0-50
Sand and red shale	130
Sand and shale	150
Shale and shells	180
Sand	195
Shale and shells	370
Red bed	430
Anhydrite	460
Shale	500
Shale and shells	840
Salt and shale	1080
Shale and shells	1150
Lime and shale	1910
Shale and lime	2200
Shale and shells	2315
Shale and lime	2435
Lime and shale	2480
Lime	2560
Lime and shale	2645
Lime	2655
Lime and shale	2730
Lime	3103
Conglomerate	3121
Lime	3155 T.D.

Schlumberger Elec. Log.

Top Topeka	2392'
Top Lansing	2746'
Top Simpson Shale	3110'
Top Arbuckle	3121'
Penetration	34'
T.D.	3155'

Drill stem test 2830-40, open 45 minutes, recovered 55' very thin mud; no oil.

SLOPE TESTS (Acid bottle)

500'	OK
1000'	OK
1500'	OK
2000'	OK
2546'	OK

7-7/8" rotary hole.

PLUGGING
 FILE SEC 35 T. 14 R. 10W
 BOOK PAGE 77 LINE 19