


15-053-20410-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

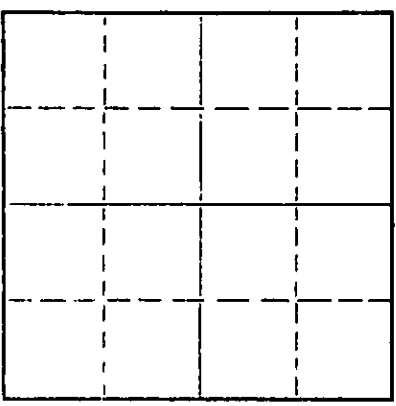

Locate well correctly on above Section Plat

Ellsworth County, Sec. 35 Twp. 14S Rge. 10W (E) (W)
Location as "NE/CNWSW" or footage from lines SE SE NW
Lease Owner Borell Oil Company
Lease Name Vanek Well No. 3
Office Address Box 391, Wilson, Kansas 67490
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed Sept. 14, 19 75
Application for plugging filed Sept. 14, 19 75
Application for plugging approved Sept. 14, 19 75
Plugging commenced Sept. 14, 19 75
Plugging completed Sept. 14, 19 75
Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well 2833 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	212'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug hole w/mud to 500'. 50 sx. cmt.. Mud to 200'. 25 sx. cmt. Mud to 40'. 1/4 sk. hulls & plug w/10 sx. cmt. 2 sx. cmt. in rathole.


09-23-75

Name of Plugging Contractor Red Tiger Drilling Company
Address 1720 Wichita Plaza, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Linda H. Dickens (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Linda H. Dickens
1720 Wichita Plaza, Wichita, Kansas 67202
(Address)

Subscribed and Sworn to before me this 15th day of September, 19 75



December 28, 1977
Diann Drennan
Notary Public.

DRILLERS LOG

No. 3 Vanek

CASING RECORD:	COMPANY:	Borell Oil Company	DESCRIPTION:
8-5/8" @ 212' w/125 sx. cmt.	CONTRACTOR:	Red Tiger Drilling Company	SE SE NW 35-14S-10W Ellsworth County, Kansas
	COMMENCED:	September 8, 1975	
	COMPLETED:	September 14, 1975	
TOTAL DEPTH: 2833'			ELEVATION: 1633' K.B.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay	0	10	
Sand	10	35	
Clay & Sand	35	70	
Shale	70	340	
Redbed	340	417	
Anhydrite	417	457	
Shale & Shells	457	870	
Shale	870	1530	
Lime & Shale	1530	2000	
Lime	2000	2665	
Shale & Lime	2665	2705	
Lime	2705	2833	

RECEIVED
 STATE OF KANSAS
 SEP 28 1975
 COUNTY OF ELLSWORTH

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Linda H. Dickens
 Linda H. Dickens

Subscribed and sworn to before me this 15th day of September, 1975.

D'Ann Drennan
 Notary Public

My Commission Expires:
 December 28, 1977

