

15-053-20301-00-01

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Ellsworth County, Sec 28 Twp 14-S Rge. (E) 10 (W)

Location as "NE/CNWxSWx" or footage from lines NE NE NE

Lease Owner L. G. Stephenson

Lease Name Kepka OWWO Well No. 1

Office Address 340 Farm Credit Banks Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) D & A

Date well completed January 7, 19 74

Application for plugging filed January 7, 19 74

Application for plugging approved January 7, 19 74


Plugging commenced January 7, 19 74

Plugging completed January 7, 19 74

Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

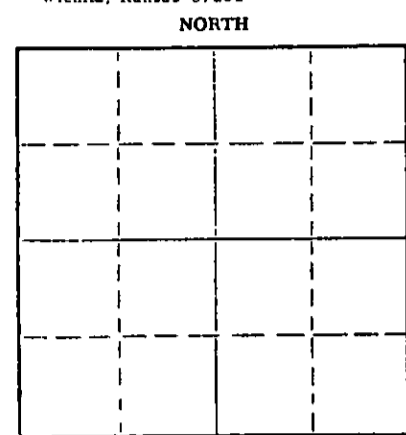

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation Depth to top Bottom Total Depth of Well 1204' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	255.48	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug set @ 500' w/40 sx. cement, fill up w/mud to 250'.
Plug set @ 250' w/25 sx. cement, fill up w/heavy mud to 40'.
Plug w/hulls and 10 sx. cement.
Job complete 1-7-74 6:00 P.M.

RECEIVED
STATE CORPORATION COMMISSION
AUG 6 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Wilson Exploration & Sun Cementing
Address P.O. Box 338, Wilson, Kansas --- P.O. Box 169, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Larry G. Stephenson (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
340 Farm Credit Banks Bldg, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 31st day of July, 19 74

[Signature]
Phyllis G. Green
Notary Public.

My commission expires August 30, 1977

DRILLERS LOG

COMPANY: L. G. Stephenson & Co.
 CONTRACTOR: Wilson Exploration & Development
 FARM: KEPKA #1 OWWO
 LOCATION: NE NE NE Section 28-14S-10W
 Ellsworth County, Kansas
 COMMENCED: January 4, 1974
 COMPLETED: January 7, 1974

<u>FORMATION</u>	<u>DEPTH</u>
Surface clay & sand	0 to 60'
Sand & shale	60 to 460'
Shale	460 to 475'
Anhydrite	475 to 503'
Shale & red bed	503 to 1204'
Total Depth	1204'

Casing Record: 8 5/8" @ 255.48' w/170 sx cement.


RECEIVED
 STATE CORPORATION COMMISSION
 AUG 6 1974
 CONSERVATION DIVISION
 Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

L. G. Stephenson & Co.


 Larry G. Stephenson

Subscribed and sworn to before me this 31st day of July, 1974.


 Phyllis Gillen Notary Public

My commission expires August 30, 1977