


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Scott County Sec. 29 Twp. 16S Rge. 31 E/W
Location as "NE/CNW/SW" or footage from lines
NW SW SE

Lease Owner Beren Corporation
Lease Name Edith Well No. #1
Office Address 970 Fourth Financial Center Wichita, KS.
67202
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

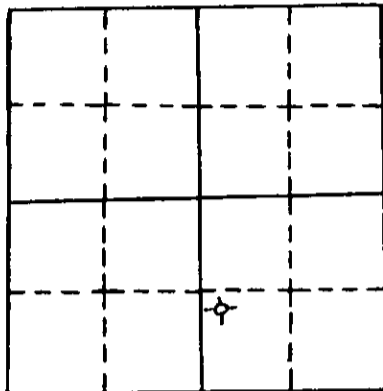

locate well correctly
on above
Section Plot

Date Well completed January 24, 19 81
Application for plugging filed January 24, 19 81
Application for plugging approved January 24, 19 81
Plugging commenced January 24, 8:30 P.M. 19 81
Plugging completed January 24, 10:00 P.M. 19 81
Reason for abandonment of well or producing formation
No Commercial Production

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gil Balthazor
Producing formation Depth to top Bottom Tl. Depth of Well
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
surface casing	60-40 poz	0	314.34'	8 5/8"	314.34'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug #1 @ 980' with 60 sxs

Plug #2 @ 300' with 30 sxs

Plug #3 @ 40' with 10 sxs

5 sxs in rathole

plugdown @ 10:00 P.M.

2-11-81
FEB 11 1981
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pioneer Drilling Company, Inc.
308 West Mill Plainville, Kansas 67663

STATE OF Kansas COUNTY OF Sedgwick, ss.


Max S. Houston (employee of owner) or ~~XXXXXX~~ of the above described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well is filed and that the same are true and correct. So help me God.

(Signature) Max S Houston

(Address) 970 Fourth Financial Center
Wichita, Kansas 67202

SUBSCRIBED AND SWORN TO before me this 9th day of February, 19 81

My commission expires



Karen G. Berry
Notary Public

W E L L L O G

OPERATOR: Beren Corporation

WELL NAME: Edith #1 LOCATION: NW SW SE 29-16S-31W

COUNTY: Scott STATE: Kansas

WELL COMMENCED: January 12, 1981 WELL COMPLETED: January 24, 1981

ELEVATION: 2941' G.L. TOTAL DEPTH: 4670'

PRODUCTION: D & A RIG NO: #2

CASING - 8 5/8": 314.34' of new 20# cemented with 225 sxs 60-40 poz 2% gel 3% cc plugdown @ 10:30 P.M. cement circ
 5 1/2": none

ALL MEASUREMENTS TAKEN FROM THE TOP OF ROTARY BUSHING:

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS:
0'	40'			
40'	324'	sand and shale		
324'	1038'	sand and shale		
1038'	1750'	sand and shale		
1750'	2120'	sand and shale	2120' - 1 degree	
2120'	2328'	sand and shale		
2328'	2359'	Anhydrite		
2359'	2430'	shale and lime		
2430'	2825'	lime and shale		
2825'	3060'	lime and shale		
3060'	3233'	lime and shale		
3233'	3480'	lime and shale		
3480'	3720'	lime and shale		
3720'	3959'	lime and shale		
3959'	4026'	lime and shale	4026' - 1 degree	
4026'	4085'	lime and shale		
4085'	4135'	lime and shale		
4135'	4240'	lime and shale		
4240'	4305'	shale and lime		
4305'	4400'	lime and shale		
4400'	4440'	lime and shale		
4440'	4440'	lime		
4440'	4542'	lime and shale		
4542'	4590'	lime and shale		
4590'	4600'	shale and lime		
4600'	4608'			
4608'	4663'	lime and shale		
4663'	4670'	shale and lime	4670' RTD	

FEB 11 1981
 CONSERVATION DIVISION

STATE OF KANSAS
 COUNTY OF

The undersigned hereby certifies that to the best of his knowledge and belief, the above facts are true and correct.

PIONEER DRILLING CO., INC.
 By Connie Jo Austin

SUBSCRIBED AND SWORN TO, BEFORE ME, This 5th day of January 31, 1981

Judy Smith
 NOTARY PUBLIC

