


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

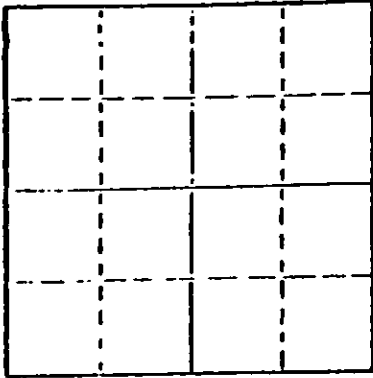

Locate well correctly on above
Section Plot

Scott County. Sec. 27 Twp. 20 Rge. 32 NE/4
Location as "NE/CNW/SW" or footage from lines
C-NW
Lease Owner XXXX Dorchester Exploration
Lease Name Hibbert Well No. 1
Office Address Midland, Texas
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole
Date Well completed _____ 19____
Application for plugging filed 3-30 1976
Application for plugging approved 4-2 1976
Plugging commenced 4-1 1976
Plugging completed 4-1 1976
Reason for abandonment of well or producing formation
Not of Commercial value
If a producing well is abandoned, date of last production
_____ 19____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Balthazer
Producing formation Hugoton Depth to top 2721 Bottom 2731 Total Depth of Well 2900
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
			371'	8 5/8"	377'	0'
				4 1/2"	2900'	40'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Pumped 2 sacks hulls, 10 sacks cement Displaced w/ 4 sacks gel- Pumped
20 sacks cement 1200' to 980'- displaced w/ 3 sacks gel- Pumped 10 sacks cement
380' to 260'- displaced w/ 2 sacks gel. Pressured to 750 lbs.
Backed off 1 jt. of 4 1/2" casing-put bridge & 10 sacks cement 40' at 0'
Top of bottom cement plug 2600'.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Midwest Gasing Pulling
Box F, Sublette, Kansas

STATE OF COLORADO COUNTY OF DENVER SE.

JAMES JAMESON (employee of owner) or (owner or operator) of the above-described
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the
above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
1400 Metrobank Bldg., Denver, Co. 80202
(Address)

Subscribed and Sworn to before me this 12th day of April 1976

My commission expires December 18, 1978

Geraldine [Signature]
Notary Public.

4-14-76