


STATE OF KANSAS
STATE CORPORATION COMMISSION

15169-20085-0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

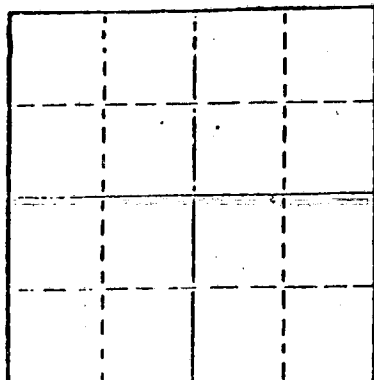

Locate well correctly on above
Section Plat

Saline County. Sec. 3 Twp. 16S Rge. 1 E ☒
Location as "NE/CNW1SW1" or footage from lines
NE SW NE
Lease Owner Rains & Williamson Oil Co., Inc.
Lease Name Walker Well No. 1
Office Address 435 Page Court, 220 W. Douglas, Wichita, KS
Character of Well (Completed as Oil, Gas or Dry Hole)

Dry hole
Date Well completed 9-5 1978
Application for plugging filed 9-5 1978
Application for plugging approved 9-5 1978
Plugging commenced 9-5 1978
Plugging completed 9-5 1978
Reason for abandonment of well or producing formation

Dry hole
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well 2675'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	165	130 sacks

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Filled hole up with rotary mud 60 vis, from T.D. 2675 up to
160'. Put in bridge plug 1/2 sacks hulls and 25 sacks cement.
Filled hole on up with rotary mud to 40'. Put in 1/2 sacks
and 10 sacks cement, put 2 sacks in rat hole.

RECEIVED
STATE CORPORATION COMMISSION

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Berentz Drilling Company

SEP 11 1978
9-11-78

STATE OF Kansas COUNTY OF Greenwood

Jack Berentz

(employee or owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature)


Box 428, Eureka, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of Sept., 1978

My commission expires April 6, 1982

Judy C. Davis
Judy C. Davis

Notary Public.



LOG OF WELL

Walker #1
NE SW NE
Section 3-16S-1W
Saline County, Ks.

OPERATOR: Rains & Williamson Oil Co., Inc. Elev. KB 1240'

CONTRACTOR: Berentz Drilling Company

Commenced with rotary: 8-30-78

Completed with rotary: 9-5-78

Casing: 8 5/8"---165' cemented with 130 sacks

Soil	3'
Shale	90
Lime with Shale Strks.	180
Lime	509
Lime & Shale	815
Shale, Shells and Sand	1315
Shale & Sand	1460
Lime & Shale	1780
Shale & Sand	2005
Lime (Lansing KC)	2264
Shale & Lime	2280
Sand & Shale	2387
Shale & Conglomerate	2617
Lime Miss.	2675 R.T.D.

RECEIVED
STATE CORPORATION COMMISSION

SEP 08 1978

CONSERVATION DIVISION
Wichita, Kansas